
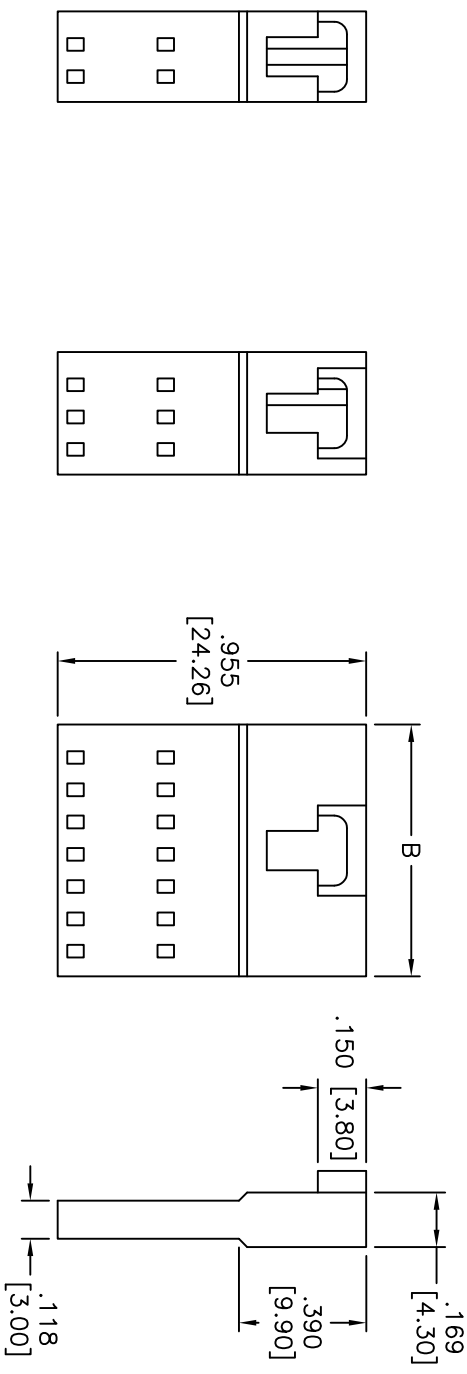


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/11/10	

APPROVED: _____
 DATE: _____ TITLE: _____

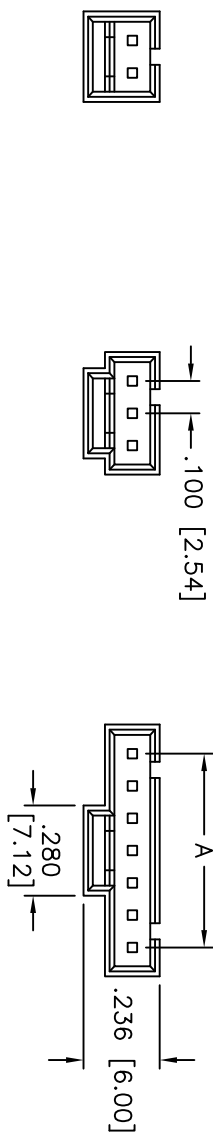

Positions: 2 thru 16
 A = .100 [2.54] x No. of Spaces
 B = A + .180 [4.58]

SPECIFICATIONS:
 Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Electrical:
 Current rating: 3A
 Voltage rating: 250V
 Insulation resistance: 1000 mohms min
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature range: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	DY	8/11/10	DATE
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	DMZ-XX-V0		
REF:	S000QT	SCALE:	NTS
SHEET	1	OF	1

TITLE: .100 [2.54] WIRE TO WIRE CONNECTOR