
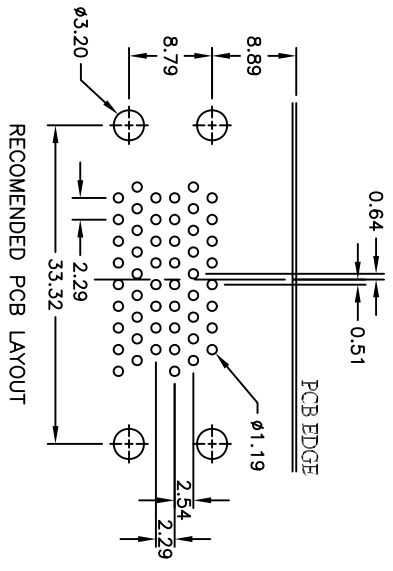
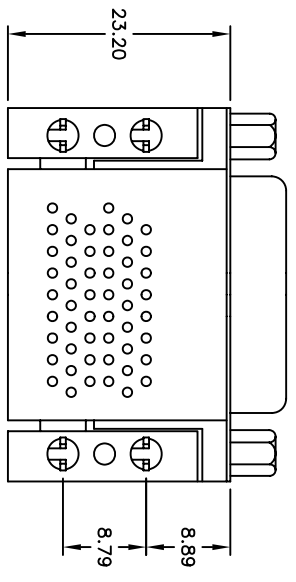


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/30/05	

APPROVED: _____
 DATE: _____ TITLE: _____

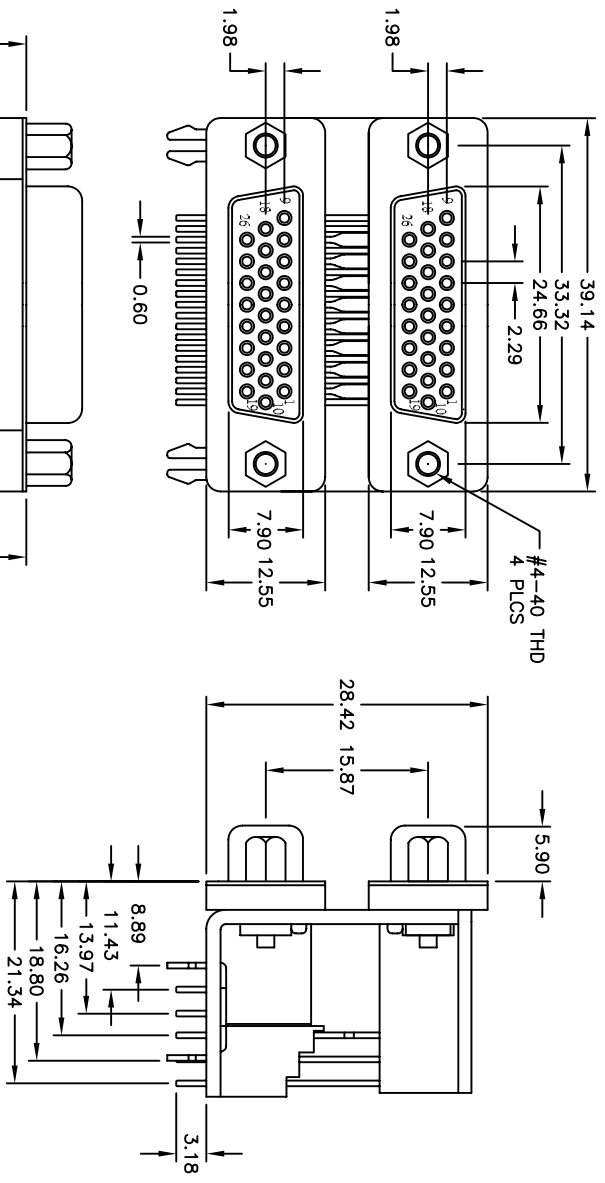

SPECIFICATIONS:

- Material: Insulator: PBT, 30% glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Shell: Steel, Nickel plated
- Plating: Gold flash over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max. Current rating: 2 Amps max. Contact resistance: 15 mohms max. initial Insulation resistance: 1,000 Mohms min. Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 230 for 5 sec.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± 0.25	∅XXX ± 0.13
.XX ± 0.15	
.XXX ± 0.05	
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, FEMALE / FEMALE
 HD26 OVER HD26, FORKED BOARDLOCKS

SIZE: X PART NO.: DPD-HD26-00-C3-JS
 SCALE: NTS SHEET 1 OF 1