
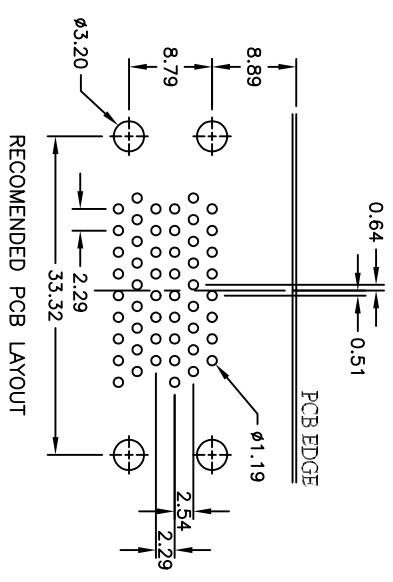
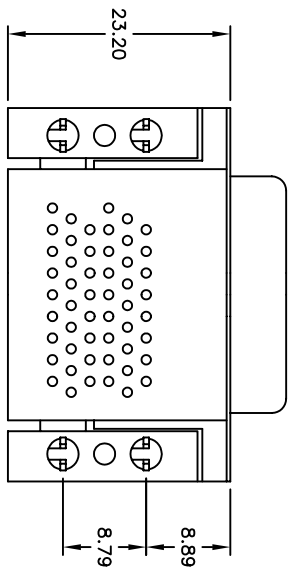


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/30/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

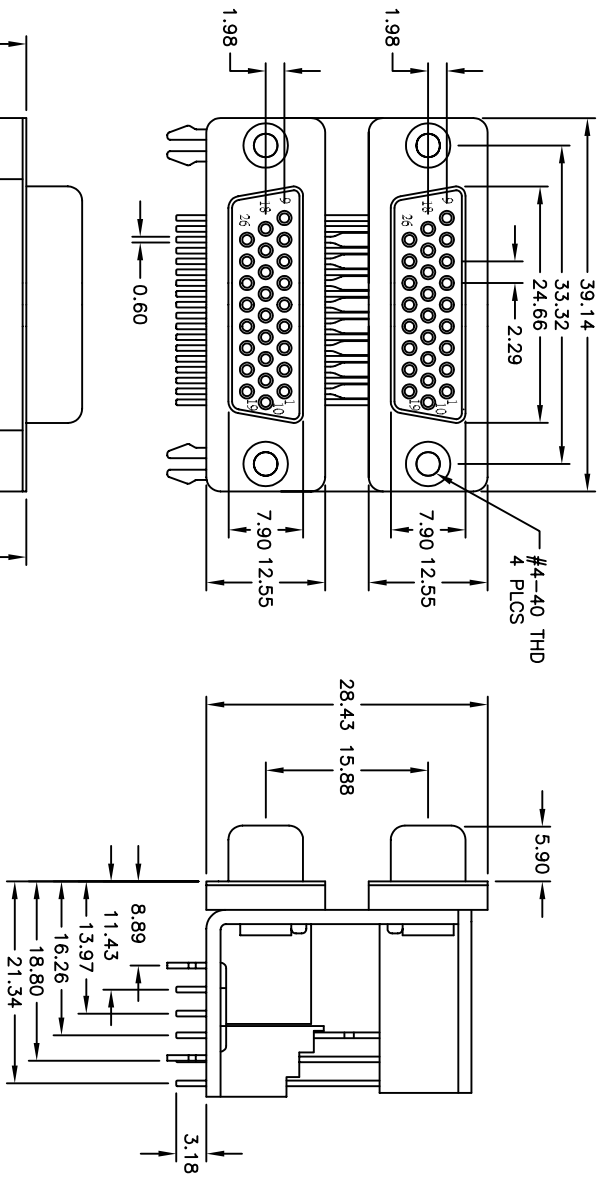

**SPECIFICATIONS:**

- Material: Insulator: PBT, 30% glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Shell: Steel, Nickel plated
- Plating: Gold flash over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max. Current rating: 2 Amps max. Contact resistance: 15 mohms max. initial Insulation resistance: 1,000 Mohms min. Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant. Recommended soldering temp: 230 for 5 sec.

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MILLIMETERS  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES

.X	± 0.25	ØXXX	± 0.13
.XX	± 0.15		
.XXX	± 0.05		

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, FEMALE / FEMALE  
 HD62 OVER HD62, FORKED BOARDLOCKS

DRAWN	SS	9/30/05	SIZE	PART NO.	REV.
CHECKED			X	DPD-HD62-00-B3	
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1