

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/04	

6

5

4





3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

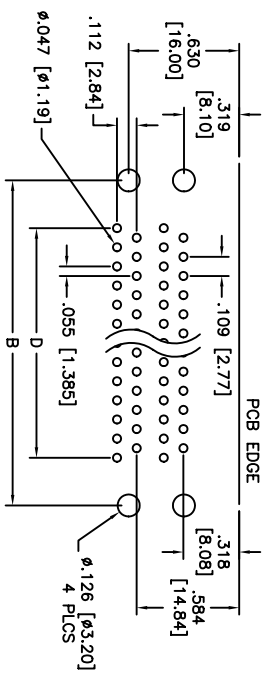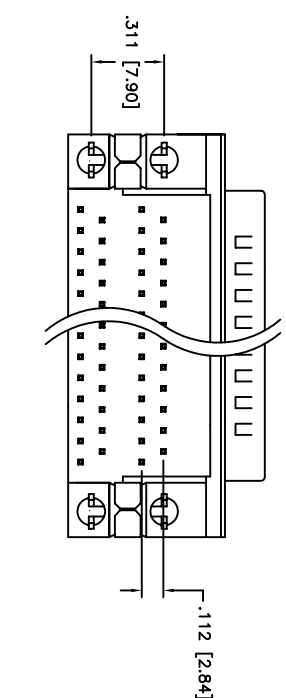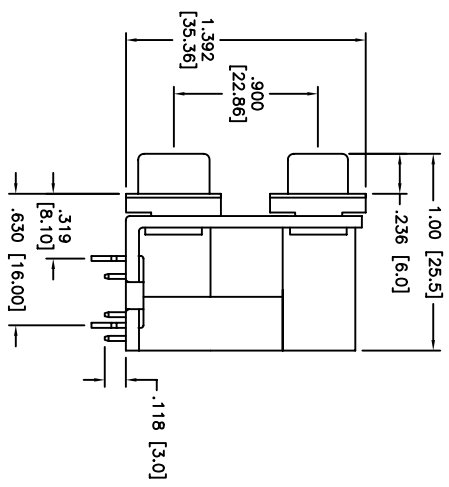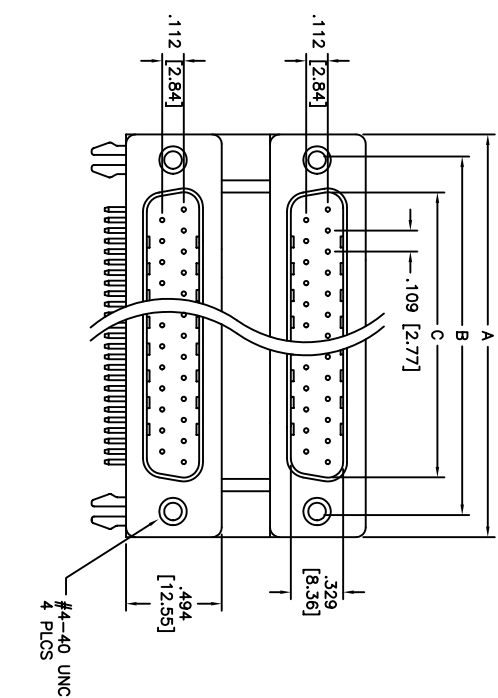

POSITIONS	A	B	C	D
9	1.212 [30.80]	.984 [24.99]	.666 [16.92]	.436 [11.08]
15	1.541 [39.14]	1.312 [33.32]	.994 [25.25]	.763 [19.39]
25	2.086 [53.00]	1.852 [47.04]	1.534 [38.96]	1.308 [33.24]
37	2.729 [69.32]	2.500 [63.50]	2.182 [55.42]	1.963 [49.86]

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Zinc plated
 Plating: 5u" Gold nom over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current ratings: 5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstand voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -65°C to +125°C

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010
 APPROVALS: _____ DATE: _____
 DRAWN: SS 11/22/04
 CHECKED: _____
 APPROVED: _____

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: DUAL PORT D-SUB, RIGHT ANGLE
 MALE / MALE, XX POSITION, .900" PORT
 SIZE: X PART NO.: DPD-XX-11-A3
 REF: SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1