

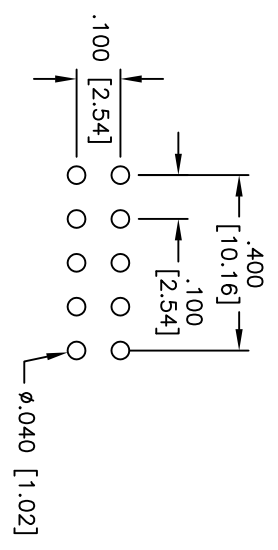
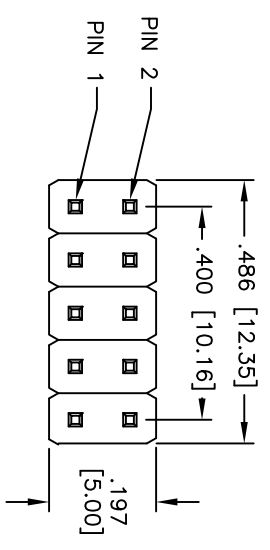


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/25/11	

APPROVED: _____
 DATE: _____ TITLE: _____

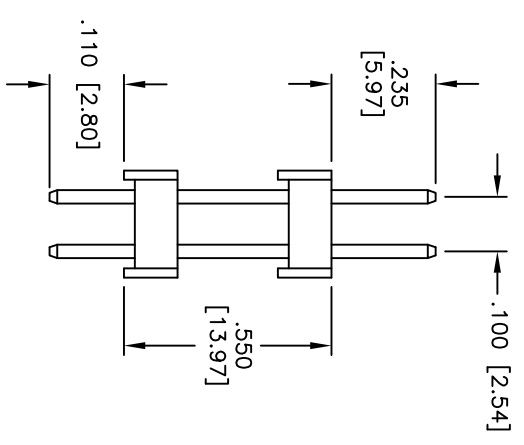

RECOMMENDED PCB LAYOUT

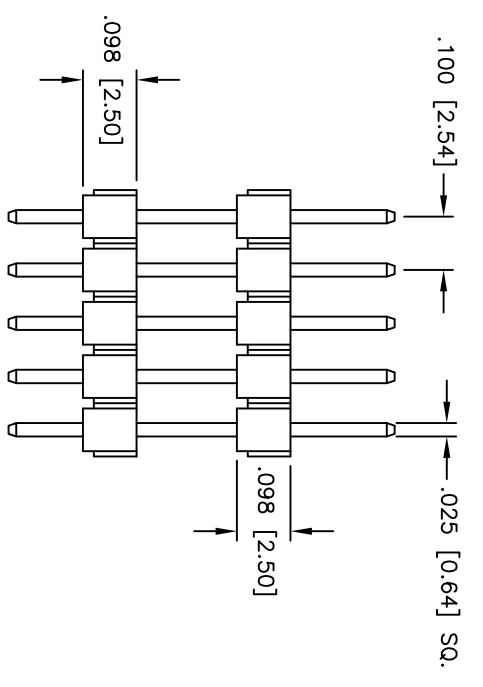

SPECIFICATIONS:

Material: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall

Electrical:
Current rating: 3 Amps
Contact resistance: 20 mohms max @ 500 VDC
Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -55°C to +105°C

Environmental: Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	2/25/11
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	.100 [2.54] DUAL ROW PIN HEADER DUAL INSULATOR, GOLD PLATED	
SIZE	PART NO.	REV.
X	DPH-2-10-U-.235/.110/.550	-
REF: S00039T	SCALE: NTS	SHEET 1 OF 1