
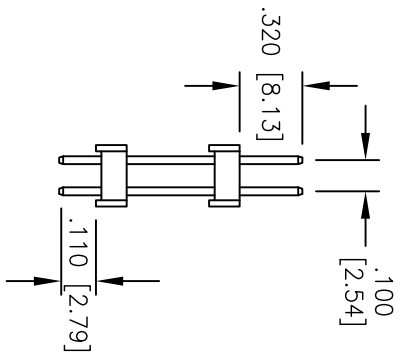
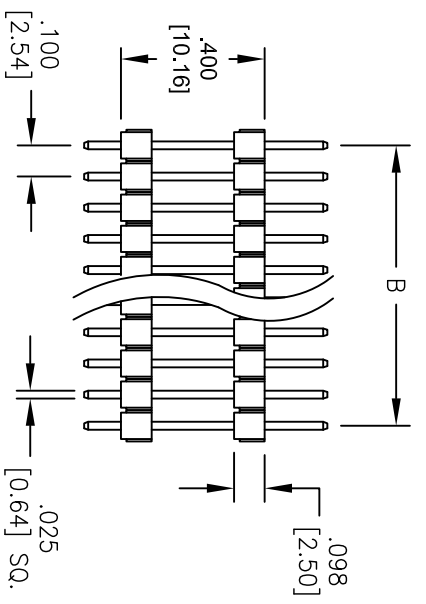
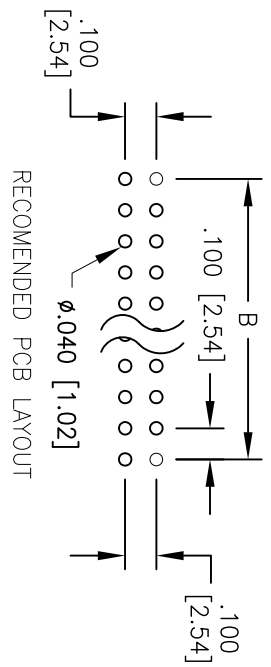


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/10	

APPROVED: _____
 DATE: _____ TITLE: _____

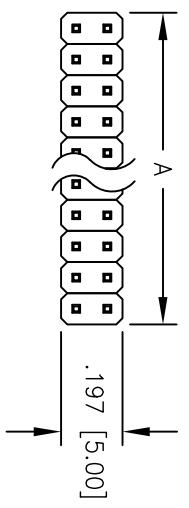

A = .100" [2.54] x No. of positions
 B = .100" [2.54] x No. of spaces

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold Flash over Nickel underplate on mating side, Tin over Copper underplate on solder tails

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amp max
 Contact resistance: 20 mohms max.
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235° for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 STACKED PIN HEADER, .100 PITCH
 DUAL ROW, PCB, SEL GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN AY	7/23/10
CHECKED AH	7/23/10
APPROVED	

SIZE X	PART NO. DPH-2-XX-SG-320/110/400	REV.
REF: S00089T	SCALE: NTS	SHEET 1 OF 1