
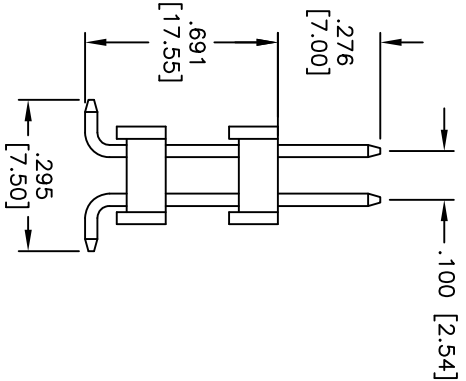
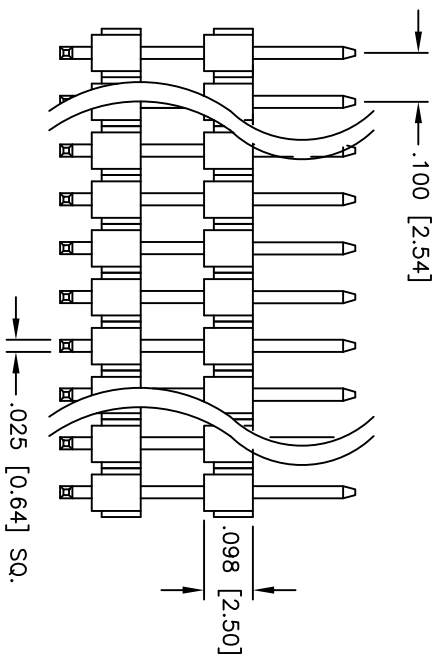
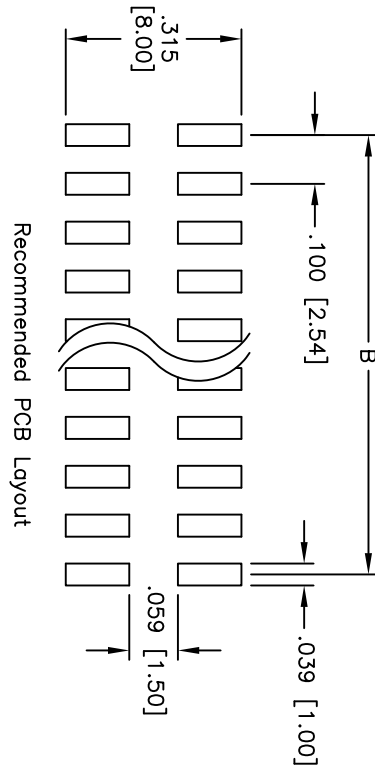


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 8/20/10 | |

APPROVED: _____
 DATE: _____ TITLE: _____

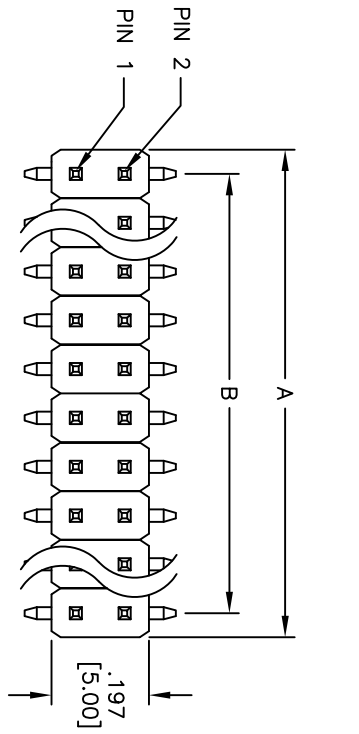

SPECIFICATIONS:

Material: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold
 Flash over Nickel underplate overall.

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amp max

Insulation resistance: 20 mohms max
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: -40°C to +105°C

Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



Positions: 2 thru 80
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

| | |
|--|--------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] | |
| TOLERANCES: EXCEPT AS NOTED | |
| INCHES | |
| HOLDERS | |
| .X ± .10 | ØXX ± .10 |
| .XX ± .020 | ØXXX ± .015 |
| .XXX ± .015 | ØXXXX ± .010 |
| APPROVALS | DATE |
| DRAWN | DY |
| CHECKED | |
| APPROVED | |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

| | | |
|-------|--|--------------|
| TITLE | .100 [2.54] DUAL ROW PIN HEADER DUAL INSULATOR, SURFACE MOUNT | |
| SIZE | PART NO. | REV. |
| X | DPH-2-XX-U-276SMT/691 | - |
| REF: | SCALE: NTS | SHEET 1 OF 1 |