

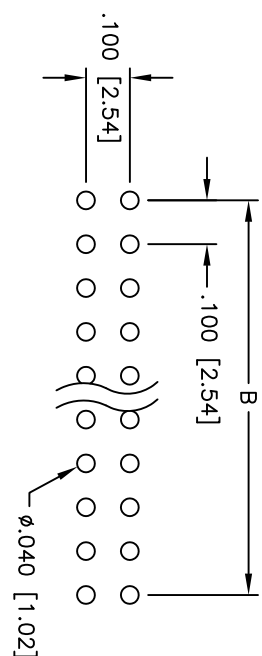
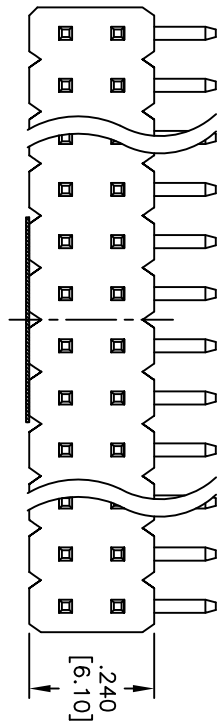


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/30/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

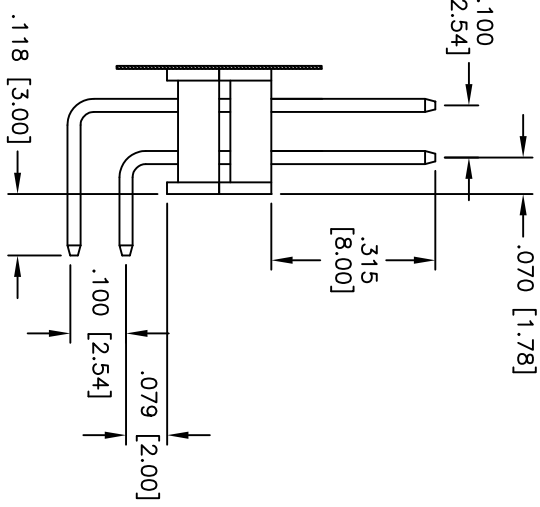

RECOMMENDED PCB LAYOUT

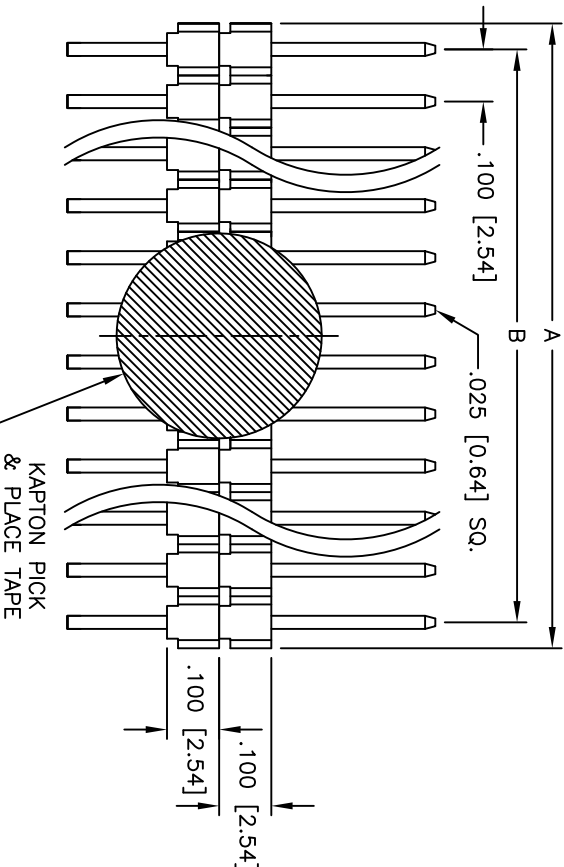

KAPTON PICK & PLACE TAPE  
 ø.394X.006  
 [10.00X0.15]

PACKAGED ON TAPE & REEL

Positions: 6 thru 60  
 A = .100 [2.54] x No. of Positions per Row  
 B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:  
 Material: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating: Gold flash over Nickel underplate overall  
 Electrical: Current rating: 3 Amps  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding: 600V AC/DC  
 Temperature Rating: Operating temperature: -40°C to +105°C  
 Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds

A

A

B

B

C

C

D

D

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DRAWN	DY	5/30/11
CHECKED		
APPROVED		

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] DUAL ROW PIN HEADER, R/A  
 DUAL INSULATOR, GOLD PLATED

6 5 4 3 2 1

SIZE	PART NO.	REV.
X	DPH2RA-XX-UB-KT-1/R	-
REF:	SCALE: NTS	SHEET 1 OF 1

