
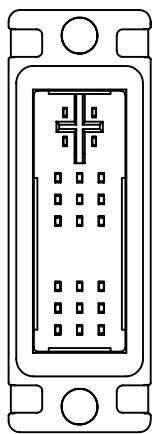
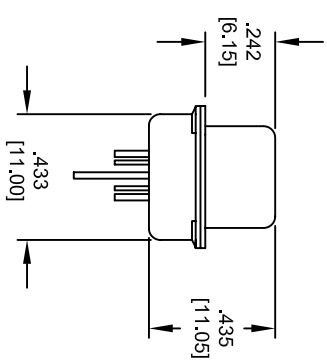
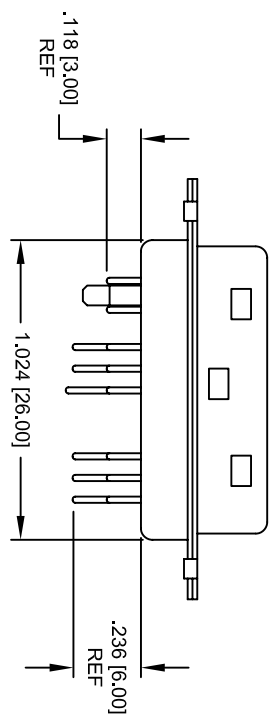


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/8/06	

APPROVED: _____
 DATE: _____ TITLE: _____

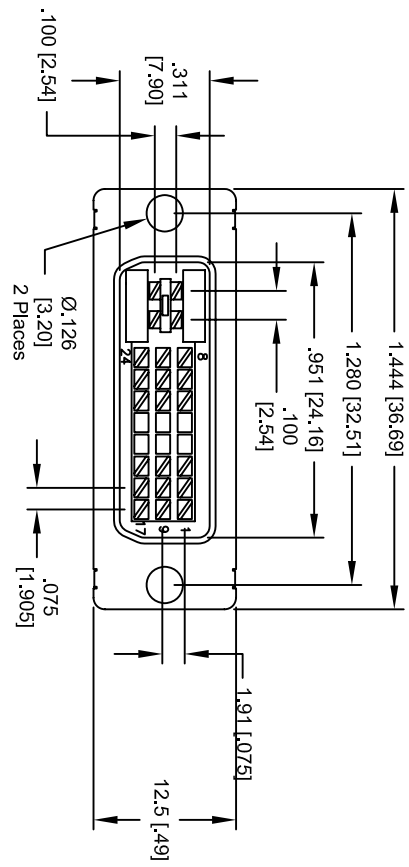

SPECIFICATIONS:

Material: Insulator: Glass filled thermoplastic, rated UL 94V-0
 Contacts: Brass
 Shell: Steel, Tin over Nickel underplate
 Board Lock: Copper Alloy, Tin plated
 Plating:
 Contacts: Gold Flash over Nickel underplate on contact area,
 Tin over Nickel underplate on solder tails

Electrical:

Operating voltage: 250 VAC max
 Current rating: 1.5 Amps @ 40V AC max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -20°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DVI CONNECTOR, 18 + 5, MALE
 STRAIGHT SOLDER CUP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	9/8/06
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DVIPT-24-1	
REF:	SCALE: NTS	SHEET 1 OF 1