
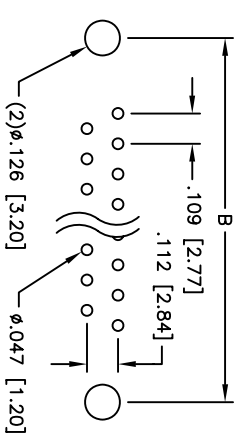
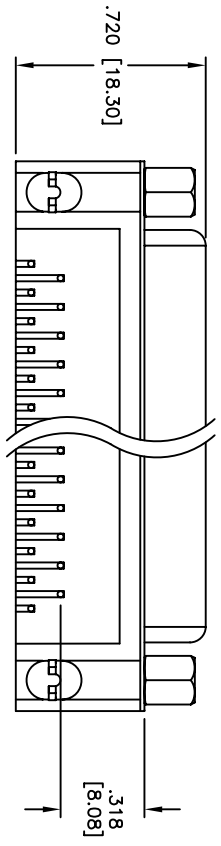
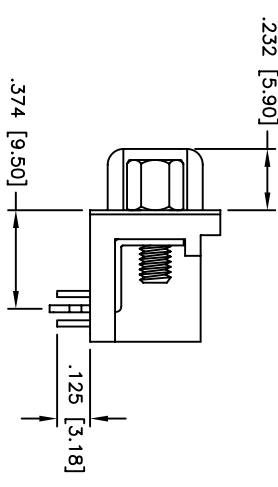


Rev	AWO #	Description	Date	Appr
-		RELEASED	02/1/06	

APPROVED: _____
 DATE: _____ TITLE: _____

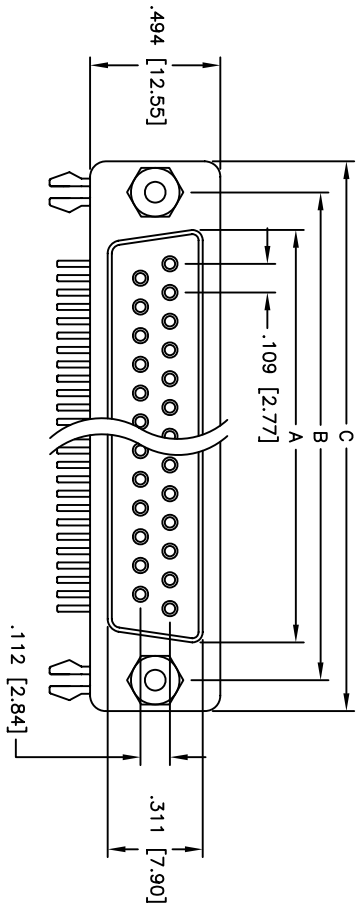

Unit: Inch / mm

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Tin plated
 Hardware: Brass, Nickel plated
 Plating:
 30u" Gold over Nickel underplate overall
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Contact resistance: 20 Mohms max
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -65°C to +125°C
Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

Positions	DIMENSIONS		
	A	B	C
9	.643 [16.33]	.984 [24.99]	1.213 [30.81]
15	.971 [24.66]	1.312 [33.32]	1.541 [39.14]
25	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]
37	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 318 [8.08] FOOTPRINT D-SUB SOCKET, #4-40
 FIXED JACKSCREWS, FORKED BOARDLOCKS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		DRAWN: SS		DATE: 02/1/06	
INCHES: .X ± .10 .XX ± .020 .XXX ± .015 .XXX ± .015		Holes: ØX ± .10 ØXXX ± .015 ØXXX ± .010		APPROVALS:	
CHECKED	APPROVED	SIZE: X	PART NO.: DXXX-SL-23-HT-30	REV.:	
APPROVED		SCALE: NTS	SHEET: 1 OF 1		