
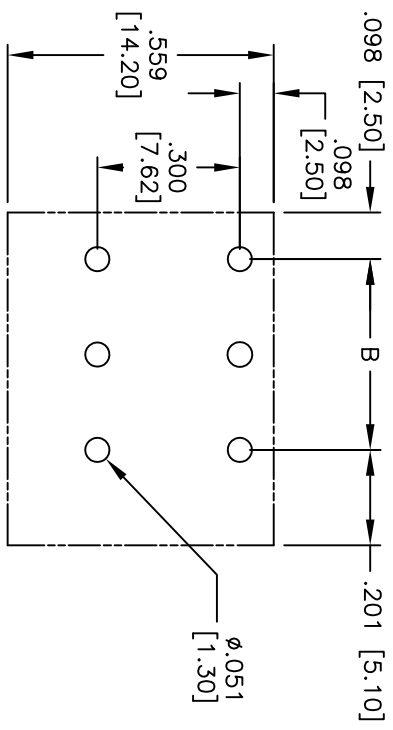
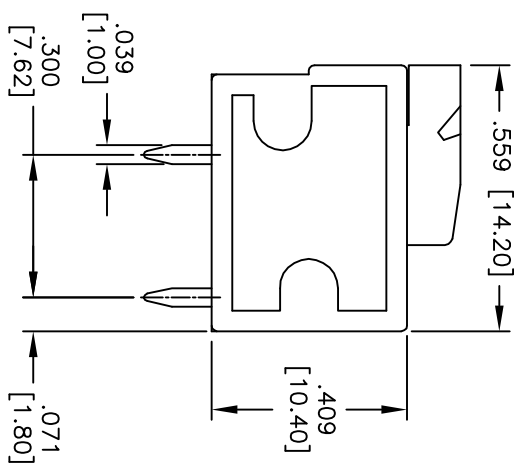


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/17/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

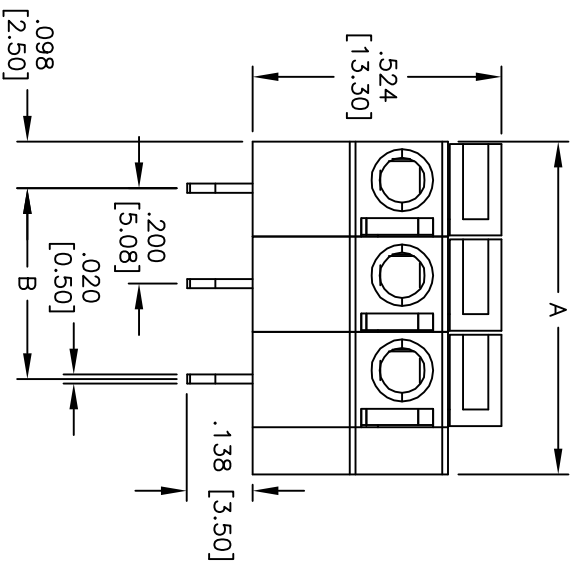

RECOMMENDED PCB LAYOUT

**SPECIFICATIONS:**

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Terminal body: Brass
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Electrical: Operation voltage: 300V AC
- Current rating: 10 Amps
- Dielectric withstanding voltage: 1600 VAC for 1 minute
- Mechanical: Wire range: 14-24 Awg
- Wire Strip length: 6-7mm
- Environmental: Operating temperature: -30°C to +105°C
- Environmental: Lead free, RoHS Compliant
- Recommended soldering temp: 235°C for 5 seconds

Poles: 02 thru 24  
 A = .200 [5.08] x No. of Positions + .100 [2.54]  
 B = .200 [5.08] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**EURO BLOCK, FRONT WIRE INLET**  
 .200 [5.08] PITCH

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	
DATE	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EB-FW-XX-D-A	-
REF: S0000T	SCALE: NTS	SHEET 1 OF 1



6 5 4 3 2 1