
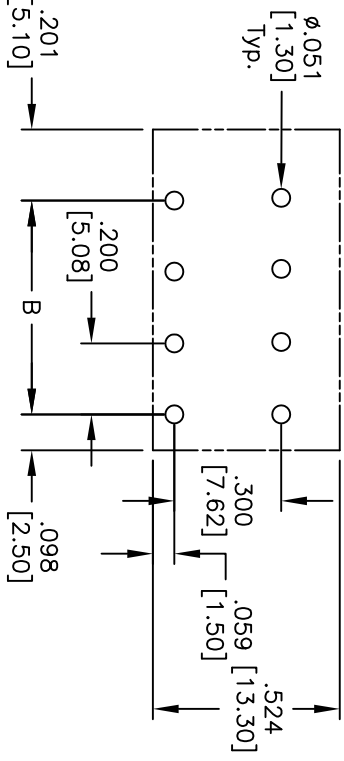
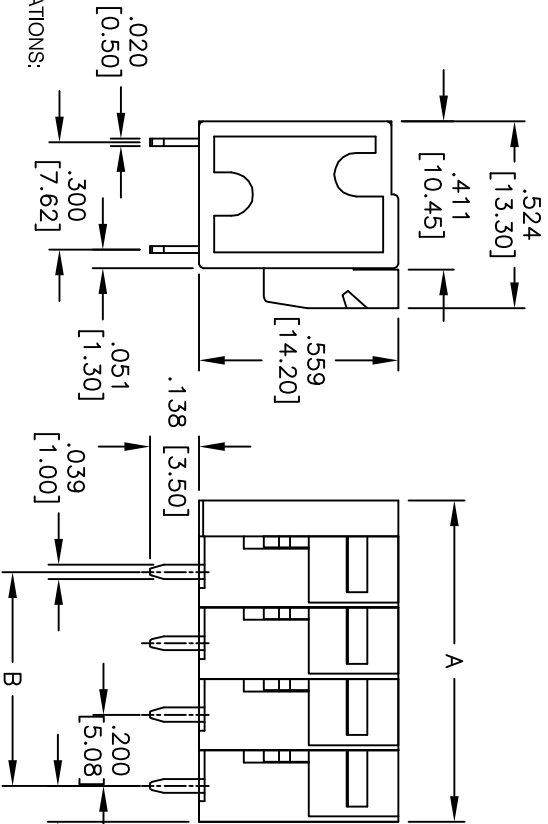


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/25/09	

APPROVED: _____
 DATE: _____ TITLE: _____



A = .200 [5.08] x No. of Positions + .100 [2.54]
 B = .200 [5.08] x No. of Spaces

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Terminal body: Brass
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated

- Electrical:
 - Operation voltage: 300V AC
 - Current rating: 10 Amps
 - Dielectric withstanding voltage: 1600 VAC for 1 minute
- Mechanical:
 - Wire range: 14-24 Awg
 - Wire Strip length: 6-7mm
- Environmental:
 - Operating temperature: -30°C to +105°C
- Environmental:
 - Lead free, RoHS Compliant
 - Recommended soldering temp: 235°C for 5 seconds



ADAM TECH
 909 Rehway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, FRONT WIRE INLET
 .200 [5.08] PITCH

TITLE _____
 SIZE _____ PART NO. _____
 REF: S0000T SCALE: NTS SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DATE	DATE
DRAWN	DY
CHECKED	
APPROVED	