
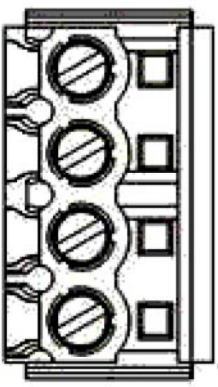


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/04/09	

APPROVED: _____
 DATE: _____ TITLE: _____

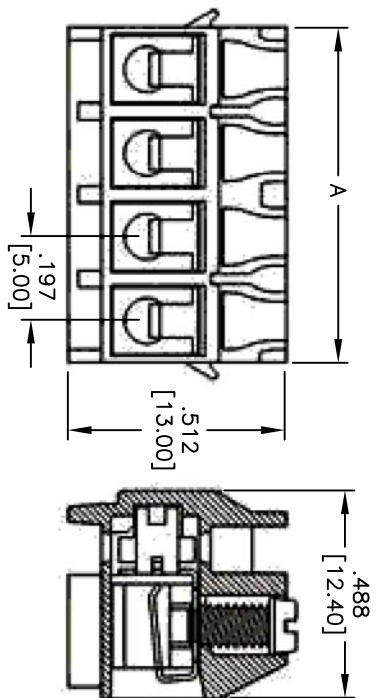

SPECIFICATIONS:
 Material: Nylon66, rated UL 94V-0
 Insulator color: Black
 Wire Cage: Brass, Nickel plated.
 Clamping: Phosphor Bronze, Tin plated
 Screw: Steel, M2.6/Zn plated.

Electrical:
 Operation voltage: 250 VAC max
 Current rating: 10 Amps max per Pole
 Contact resistance: 20 Mohms max

Mechanical:
 Screw Torque: 0.4Nm
 Wire Range: 14-22Awg.
 Environmental:
 Operating temperature: -30°C to +105°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



Poles: 2 thru 24
 A = .197 [5.00] x No. of Poles

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN DY	11/04/09
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	TERMINAL BLOCK, .197 [5.00] PITCH
SIZE	PART NO.
X	EB111-XX-C
REF: S00007T	SCALE: NTS
SHEET 1 OF 1	REV.