
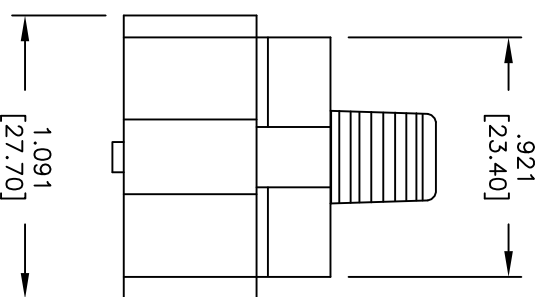
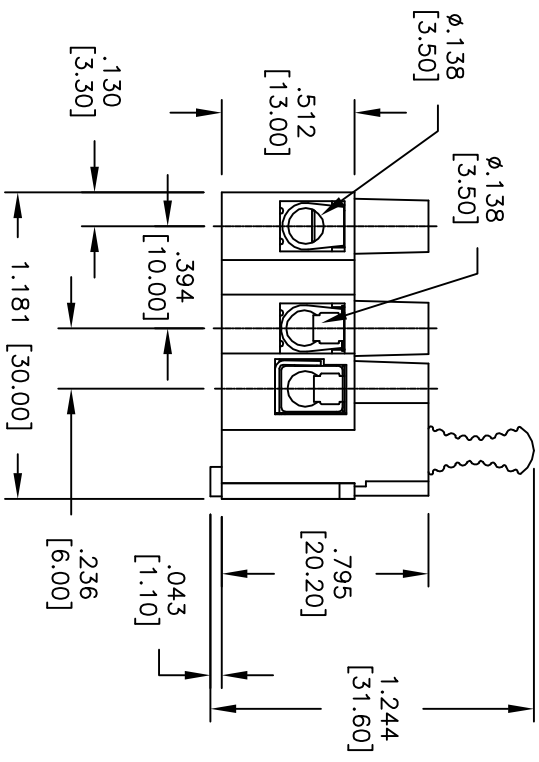


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/30/10	

APPROVED: _____

DATE: _____ TITLE: _____

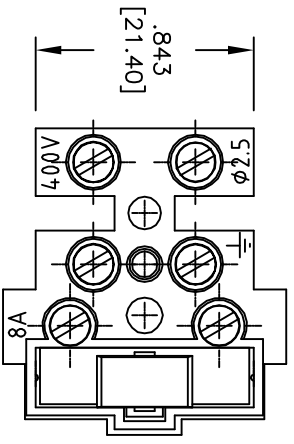

SPECIFICATIONS:

Material: Thermoplastic, rated UL 94V-0

Insulator: Brass, Tin plated

Terminal Screw: Steel zinc plating, "—" slot type

Wire guard: Stainless steel

Electrical:

Voltage rating: 400VAC

Current rating: 8A

Withstanding voltage: 1.8KV

Mechanical:

Screw: M3

Torque(Lb-In): 3.5

Stranded Wire: 14-22 Awg.

Environmental:

Operating temperature: -30°C to +105°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE
4/30/10

DRAWN: DY
CHECKED: _____
APPROVED: _____

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, 3 POLES

SIZE	PART NO.	REV.
X	EB113-03	-
REF:	S00007T	SCALE: NTS
SHEET 1 OF 1		

6 5 4 3 2 1