Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/20/09	

APPROVED: _____

DATE: _____ TITLE: _____

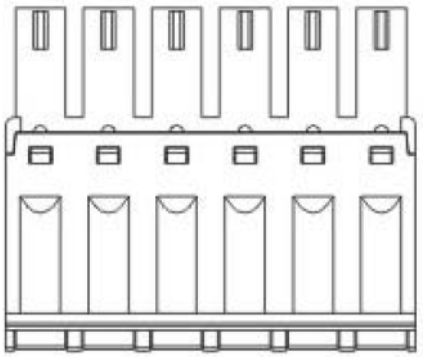

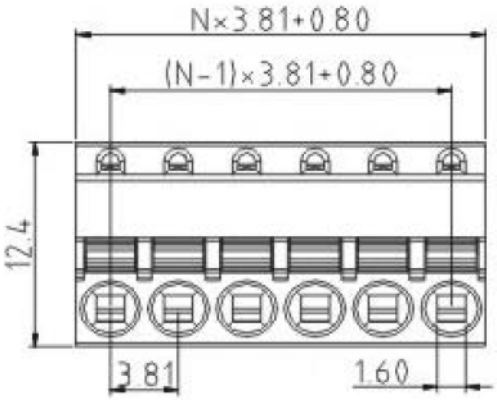

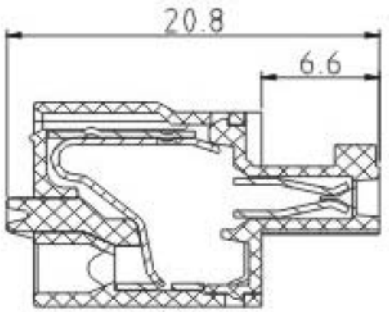

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Contact: Phosphor Bronze, Tin plated
Electrical:
Operation voltage: 125 VAC max
Current rating: 4 Amps max per Pole
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min @ DC500V
Dielectric withstanding voltage: 1250 VAC for 1 minute
Mechanical:
Wire Range: 20 to 28 Awg
Environmental:
Operating temperature: -30°C to +105°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/20/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
TERMINAL BLOCK, SPRING FOR PLUGGABLE, 3.81MM PITCH

SIZE	PART NO.	REV.
X	EB2-XX-M-B	-

REF:	SCALE:	SHEET
S00007T	NTS	1 OF 1