
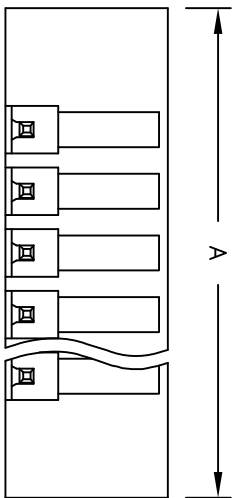
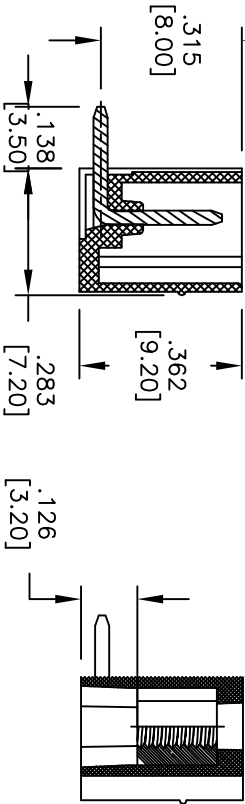
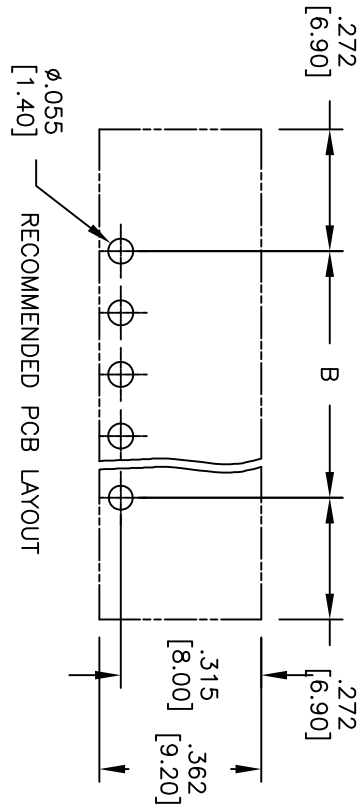


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/10	

APPROVED: _____
 DATE: _____ TITLE: _____

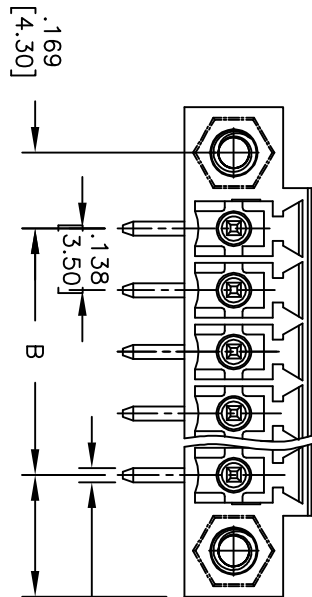

Poles: 2 thru 24
 A = .138 [3.50] x No. of (Poles - 1) + .543 [13.80]
 B = .138 [3.50] x No. of (Poles - 1)

SPECIFICATIONS:
 Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Copper Alloy, Tin plated
 Flange Nut: Brass, M2.5
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 10 Amps max
 Withstanding voltage: 1.6KV
 Environmental:
 Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN DY	3/24/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EB3-XX-A-E	-

REF: S00007 SCALE: NTS SHEET 1 OF 1