
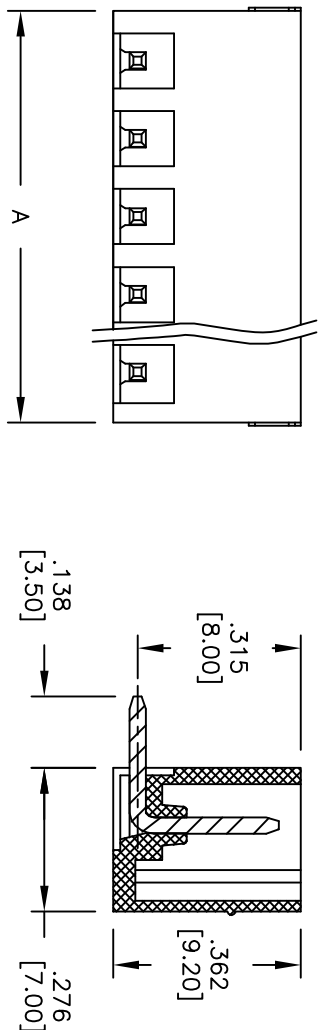


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/09	

APPROVED: _____
 DATE: _____ TITLE: _____

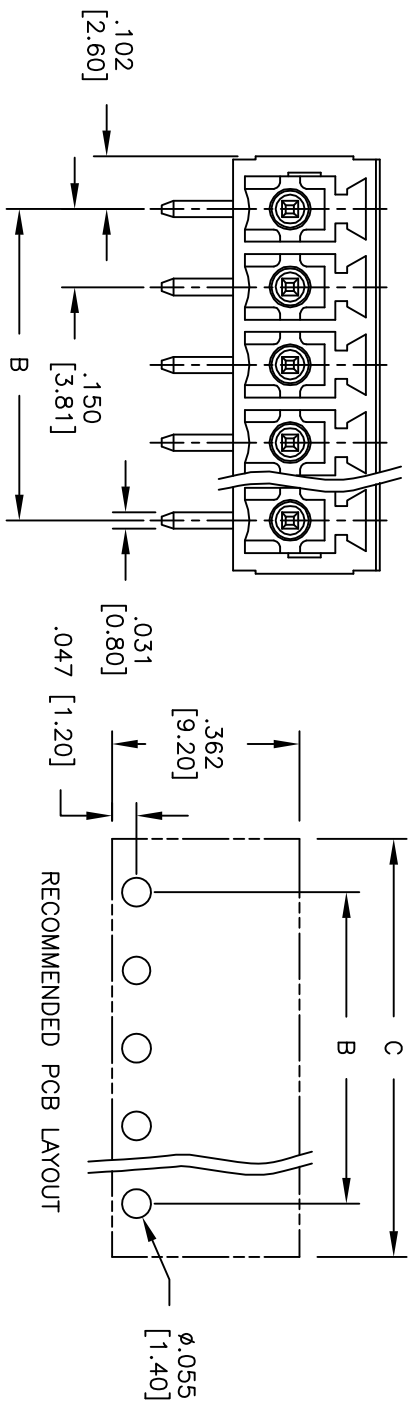

Poles: 2 thru 24
 A = .150 [3.81] x No. of (Poles - 1) + .193 [4.90]
 B = .150 [3.81] x No. of (Poles - 1)
 C = .150 [3.81] x No. of (Poles - 1) + .205 [5.20]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

.150 [3.81] TERMINAL BLOCK

SPECIFICATIONS:
 Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Electrical: Operating voltage: 300 VAC max
 Current rating: 10 Amps max
 Withstanding voltage: 1.6kV
 Environmental: Operating temperature: -30°C to +105°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TITLE	
TOLERANCES: EXCEPT AS NOTED		.150 [3.81] TERMINAL BLOCK	
INCHES		PART NO.	
.X ± .10	ØX ± .10	E83-XX-B	
.XX ± .020	ØXX ± .015	SIZE	REV.
.XXX ± .015	ØXXX ± .010	X	-
APPROVALS		REF:	SHEET 1 OF 1
DRAWN	DY	10/22/09	
CHECKED			
APPROVED		S00007T	