

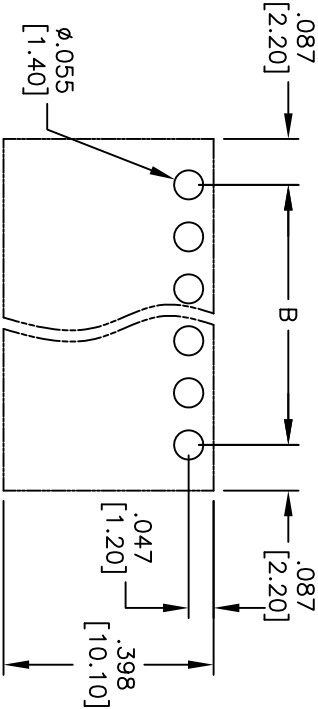
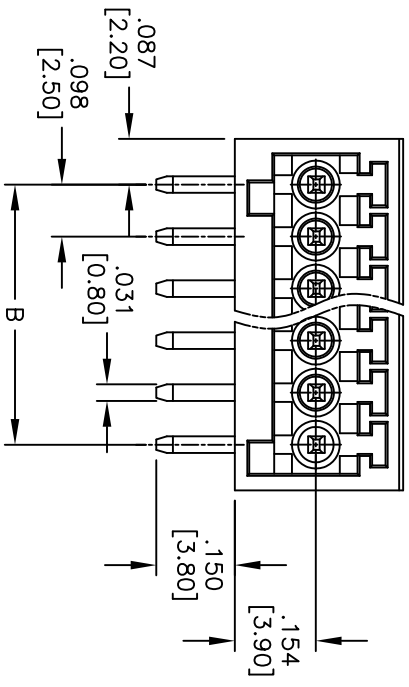
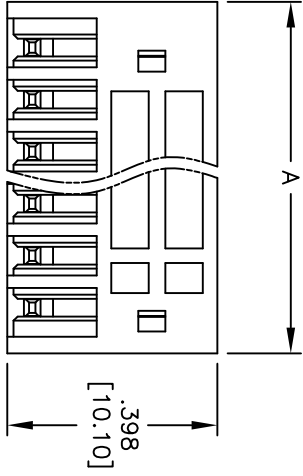


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/29/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

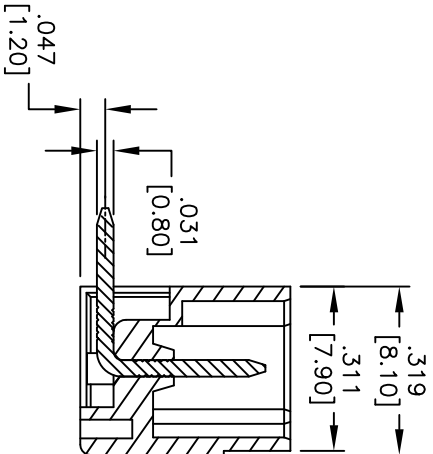

RECOMMENDED PCB LAYOUT

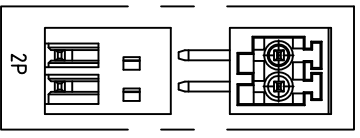

Poles: 2 thru 24  
 A = .098 [2.50] X No. of Positions + .075 [1.90]  
 B = .098 [2.50] X No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Contact: Copper, Tin plated.
- Electrical: Operation voltage: 150 VAC
- Current rating: 4 Amps
- Withstanding Voltage: 1.3KV
- Environmental: Operating temperature: -40°C to +115°C
- Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, 098 [2.50] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	6/29/11
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EB3-XX-V	-
REF: S00007T	SCALE: NTS	SHEET 1 OF 1