
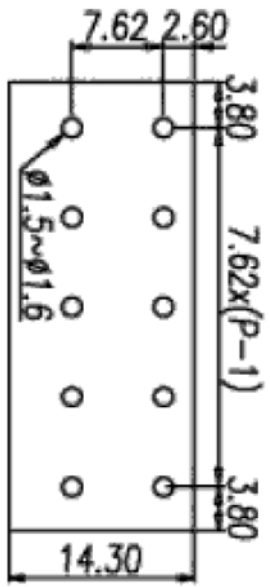


Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/20/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

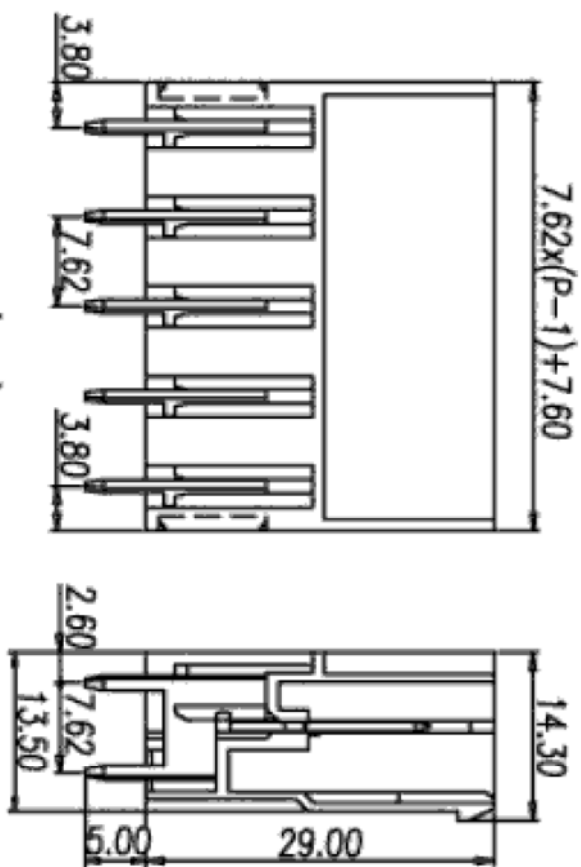

**SPECIFICATIONS:**

Material:  
 Insulator: PA66, rated UL 94V-0  
 Insulator color: Green  
 Contact: Copper, Tin plated.  
 Electrical:  
 Operation voltage: 300 VAC max  
 Current rating: 30 Amps max per Pole  
 Contact resistance: 20 mohms max  
 Insulation resistance: 500 Mohms min @ DC500V  
 Dielectric withstanding voltage: 1600 VAC for 1 minute  
 Environmental:  
 Operating temperature: -40°C to +105°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, SOCKETS FOR PLUGGABLE,  
 STRAIGHT, 7.62MM PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		
DRAWN	DY	3/20/09	
CHECKED			
APPROVED			

REF:	SIZE	PART NO.	SCALE	SHEET	REV.
S0002AT	X	EB43-XX-G-180	NTS	1 OF 1	-