| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 11/30/10 | |

APPROVED: _____

DATE: _____ TITLE: _____

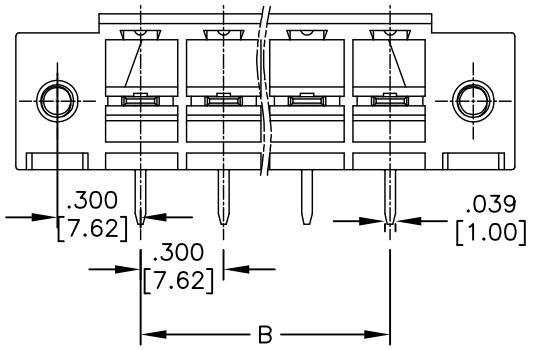


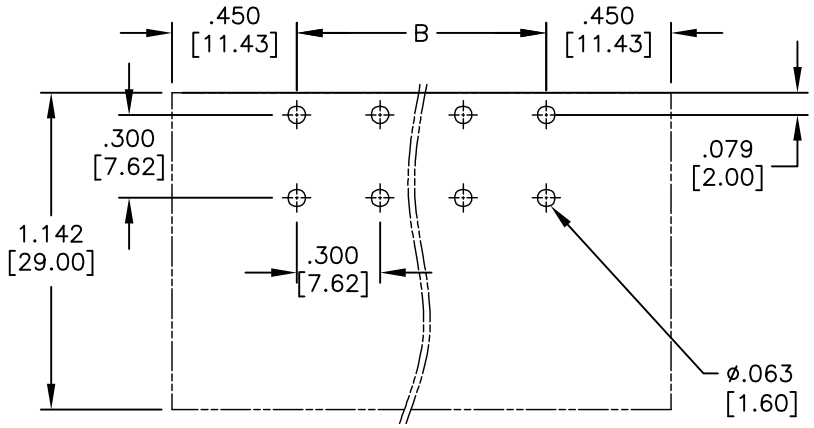


RECOMMENDED PCB LAYOUT

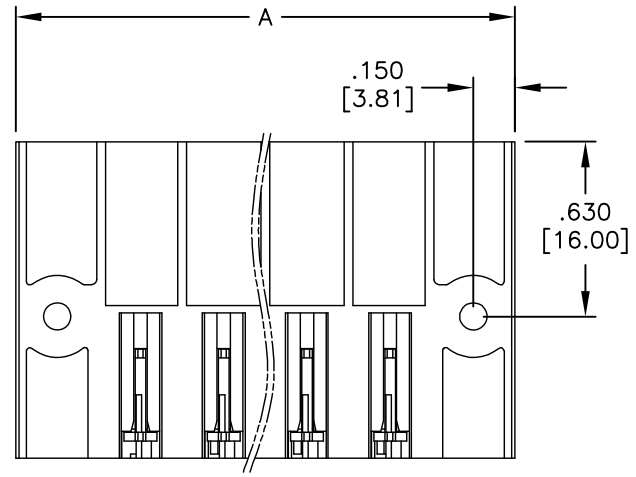


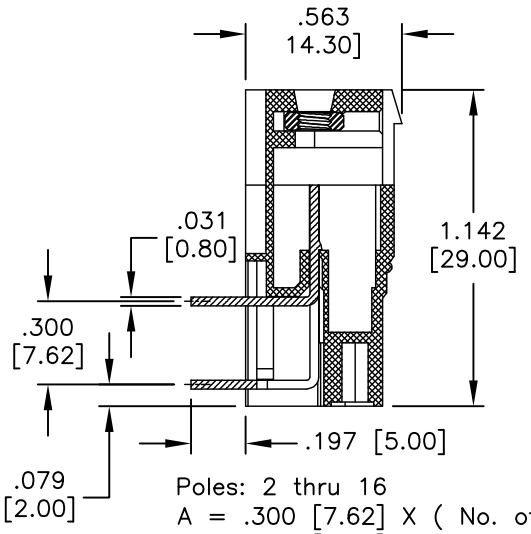


Poles: 2 thru 16
A = .300 [7.62] X ( No. of Positions + 2 )
B = .300 [7.62] X No. of Spaces

**SPECIFICATIONS:**
Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Screw: M3.0, Steel, Zn plated.
Contact: Copper Alloy, Tin plated.
Electrical:
Operation voltage: 300 VAC
Current rating: 32 Amps
Mechanical:
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: –40°C to +115°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | AY | 11/30/10 |
| CHECKED | AH | 11/30/10 |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710


TITLE
EURO BLOCK, PCB, .300 [7.62] PITCH, W/ FLANGE

| SIZE | PART NO. | REV. |
|---|---|---|
| X | EB43-XX-G-E-NUT | - |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00007T | NTS | 1 OF 1 |