Rev	AWO #	Description	Date	Appr
-		RELEASED	4/07/11	

APPROVED: _____

DATE: _____ TITLE: _____

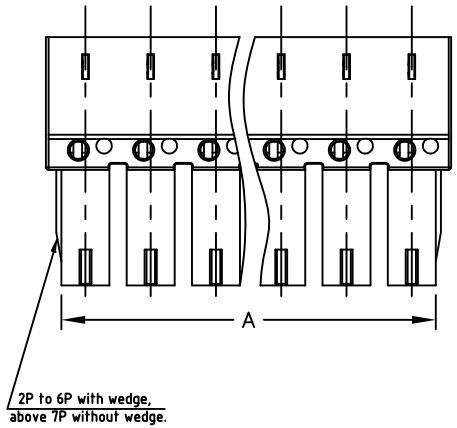

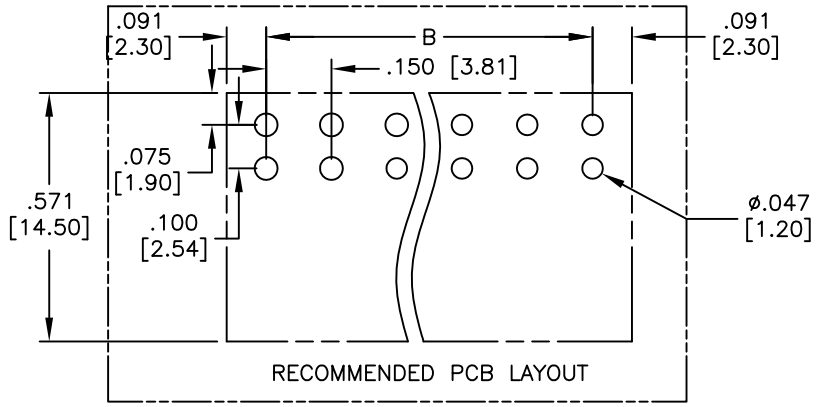

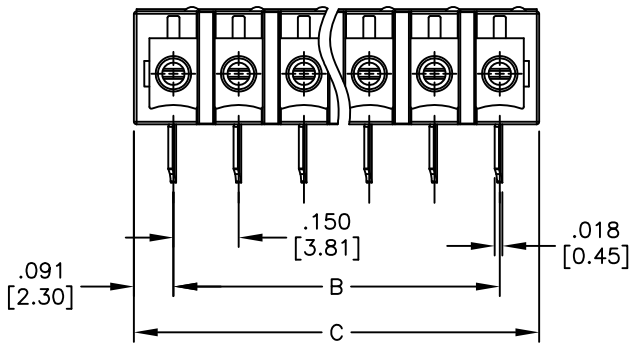

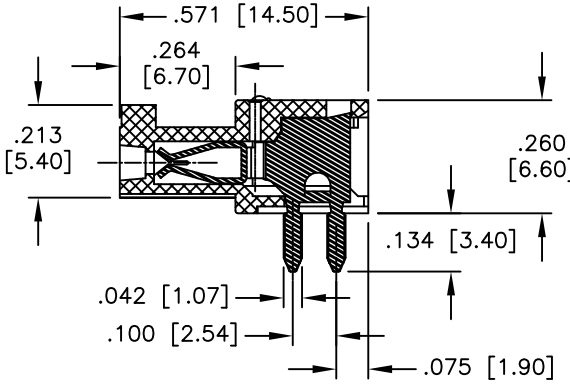

Positions: 2 thru 24
A= .150 [3.81] x No. of (Poles−1) + .110 [2.80]
B= .150 [3.81] x No. of (Poles−1)
C= .150 [3.81] x No. of (Poles−1) + .181 [4.60]

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V−0
Insulator color: Black
Contact: Phosphor Bronze, Tin plated
Electrical:
Operation voltage: 300 VAC max
Current rating: 8 Amps
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: −40°C to +115°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	4/07/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908−687−5000 Fax: 908−687−5710

TITLE
TERMINAL BLOCK, PCB, .150 [3.81] PITCH

SIZE	PART NO.	REV.
X	EB50-A-XX-B-BK	-

REF: S00007T | SCALE: NTS | SHEET 1 OF 1