
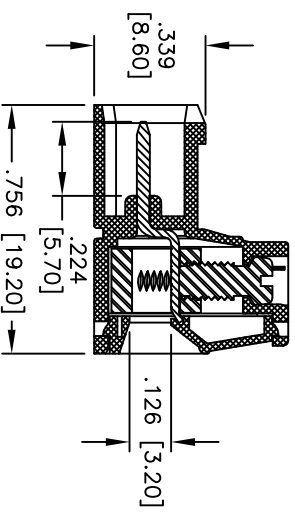
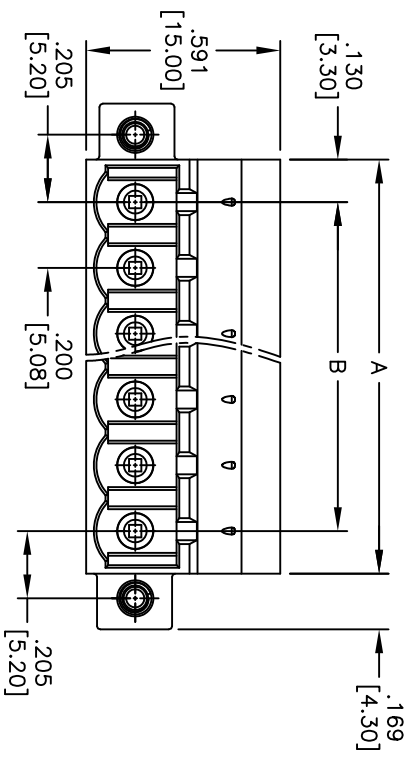


Rev	AWO #	Description	Date	Appr
-	10651	RELEASED	10/25/10	

APPROVED: _____
 DATE: _____ TITLE: _____

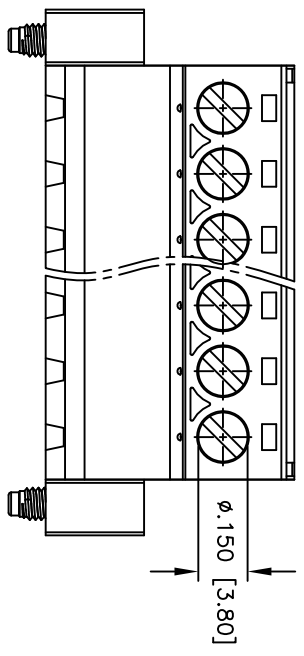

SPECIFICATIONS:

Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Flange Screw: M2.5, Steel, Zinc plated
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 20 Amps
 Torque: 4Lb-in
 Solid wire (AWG): 12-24
 Stranded wire (AWG): 12-24
 Withstanding Voltage: 1.6KV
 Environmental:
 Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.

Positions: 2 thru 24
 A = .200 [5.08] x No. of (Poles-1) + .259 [6.58]
 B = .200 [5.08] x No. of (Poles-1)

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

**TERMINAL BLOCK, 200 [5.08] PITCH
 W/ FLANGE SCREW TYPE**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

TITLE	SIZE	PART NO.	REV.
TERMINAL BLOCK, 200 [5.08] PITCH W/ FLANGE SCREW TYPE	X	EB86-XX-D-E-SCR	-
REF:	SCALE:	SHEET	1 OF 1
S00007T	NTS		



6 5 4 3 2 1