
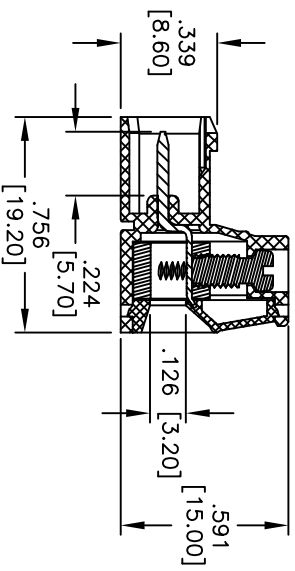
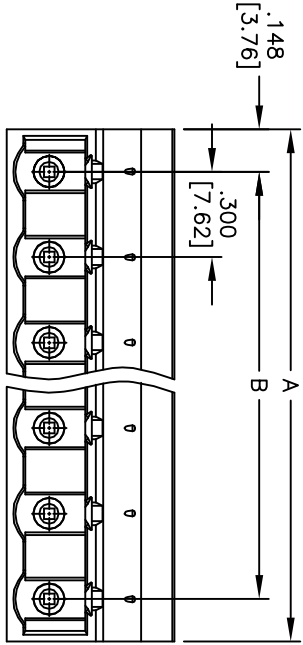


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/04/10	

APPROVED: _____
 DATE: _____ TITLE: _____

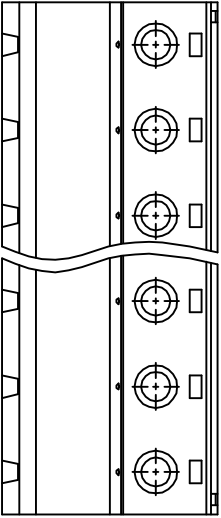

Positions: 2 thru 24
 A= .300 [7.62] x No. of (Poles-1) + .296 [7.52]
 B= .300 [7.62] x No. of (Poles-1)

SPECIFICATIONS:
 Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Screw: Steel, Zinc plated
 Electrical:
 Operation voltage: 600 VAC max
 Current rating: 10 Amps
 Screws Torque: 0.5-0.6 Nm
 Wire Range: 12-24 AWG Solid or Stranded
 Withstanding Voltage: 6KV
 Environmental:
 Operating temperature: -30°C to +105°C
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **TERMINAL BLOCK, .300 [7.62] PITCH**

SIZE	PART NO.	REV.
X	EB86-XX-G	-
REF:	S00007T	
SCALE:	NTS	
SHEET	1 OF 1	

6 5 4 3 2 1