
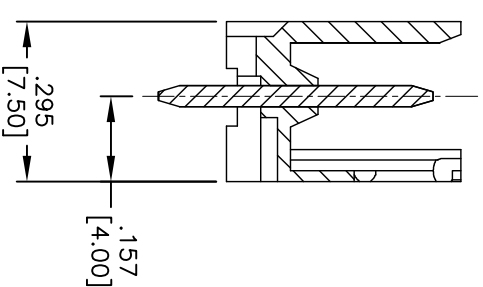
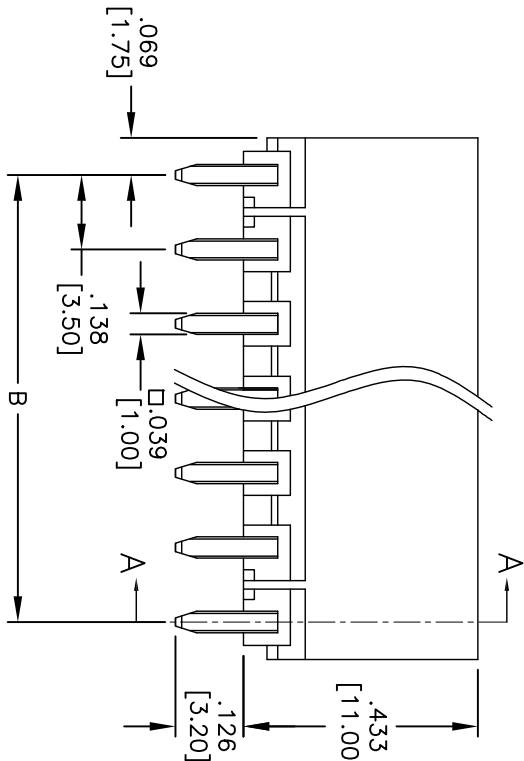
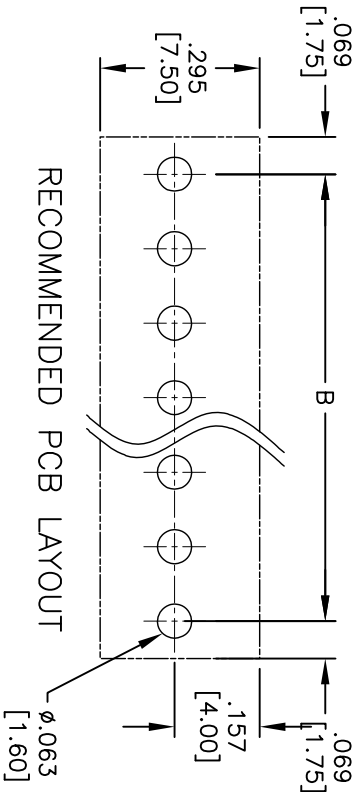


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/22/11	

APPROVED: _____
 DATE: _____ TITLE: _____

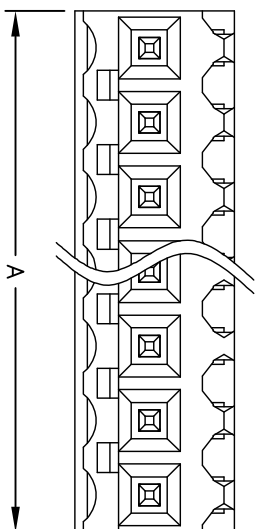

Poles: 2 thru 24
 A = .138 [3.50] X No. of Positions
 B = .138 [3.50] X No. of Spaces

SPECIFICATIONS:

- Material: Insulator: PA66, rated UL 94V-0
- Insulator color: Green
- Contact: Copper Alloy, Tin plated.
- Electrical: Operation voltage: 300 VAC
- Current rating: 10 Amps
- Mechanical: Withstanding Voltage: 1.6KV
- Environmental: Operating temperature: -40°C to +115°C
- Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE
AY	2/22/11
WV	2/22/11

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, PCB, .138 [3.50] PITCH STRAIGHT

DRAWN	AY	2/22/11	SIZE	PART NO.	REV.
CHECKED	WV	2/22/11	X	EB99-XX-A	
APPROVED			REF: S00007T	SCALE: NTS	SHEET 1 OF 1