Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/11	

APPROVED: _____

DATE: _____ TITLE: _____



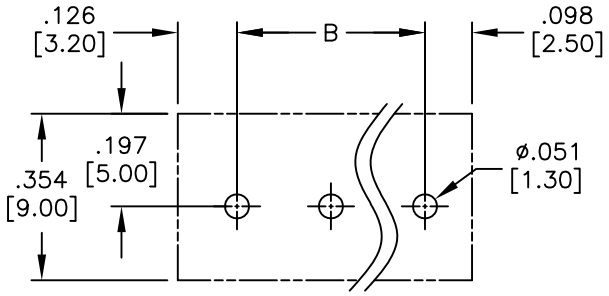

RECOMMENDED PCB LAYOUT

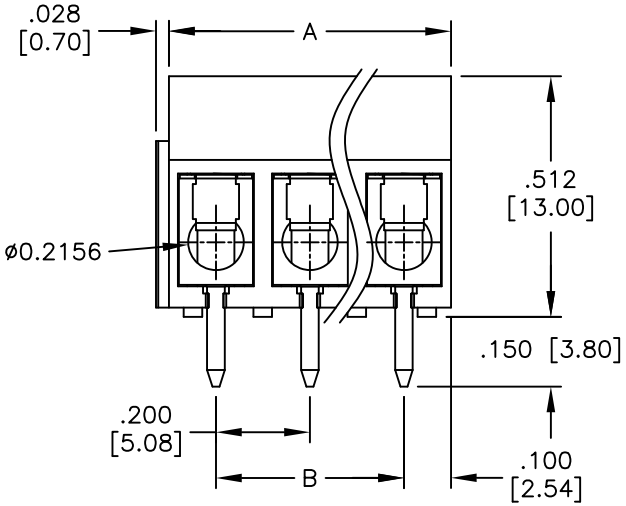

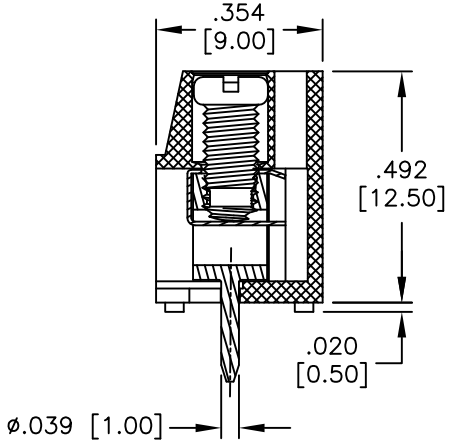

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Blue
Terminal: Brass, Tin plated
Wire guard: Stainless steel
Screw: Steel, M3/Zn plated.
Electrical:
Operation voltage: 300VAC
Current rating: 15A
Withstanding voltage: 1.6KV
Mechanical:
Torque: 3.5 Lb-In
Solid wire: 14-22 Awg.
Environmental:
Operating temperature: -40°C to +115°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

A = .200 [5.08] x No. of Positions
B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/08/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
EURO BLOCK, VERTICAL, PCB TYPE
.200 [5.08] PITCH, COLOR BLUE

SIZE	PART NO.	REV.
X	EBA-XX-D-BU-01	-

REF: S00007T | SCALE: NTS | SHEET 1 OF 1