
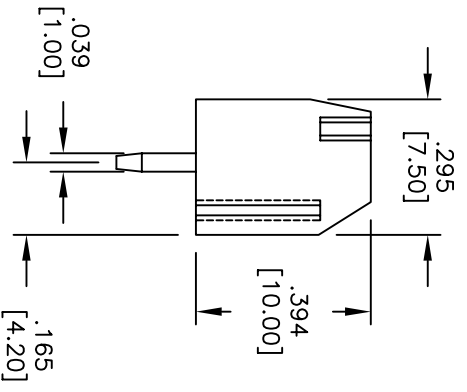
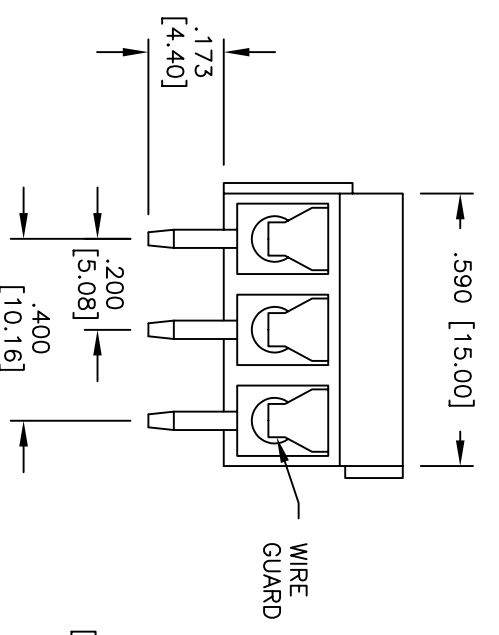
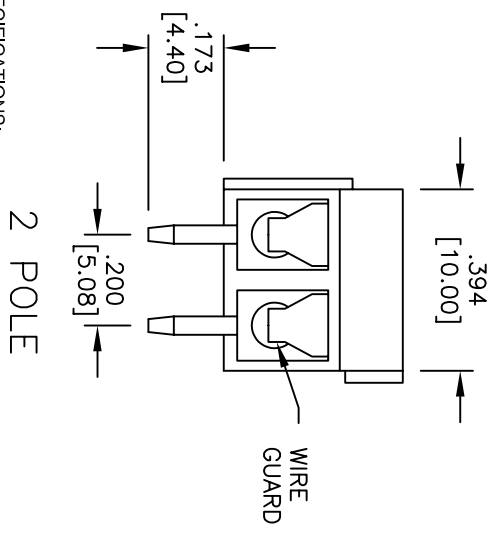
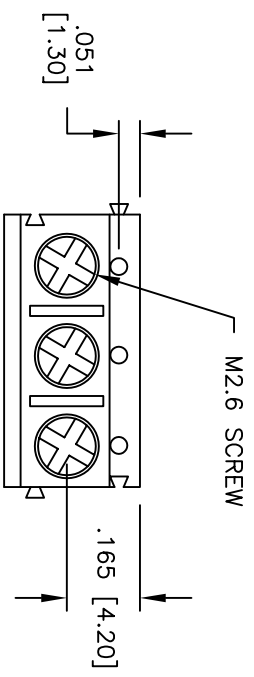


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/04	

APPROVED: _____
 DATE: _____ TITLE: _____

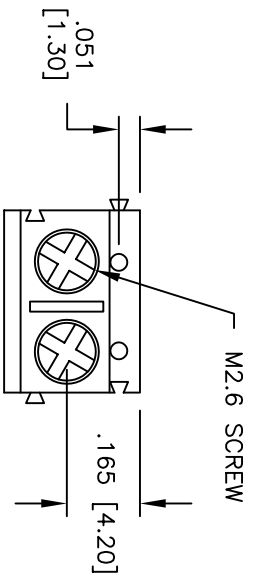

2 POLE

3 POLE

SPECIFICATIONS:

- Material: Insulator: Nylon, rated UL 94V-0
- Insulator color: Green
- Metal Housing: Brass
- Wire Guard: Stainless Steel
- Screw: Steel, Galvanized and Chromated.
- Electrical:
 - Operation voltage: 300 VAC max
 - Current rating: 10 Amps max per Pole
 - Contact resistance: 20 mohms max
 - Insulation resistance: 5000 Mohms min @ 1000V
 - Dielectric withstanding voltage: 1500 VAC for 1 minute
- Mechanical:
 - Screw Torque: 4 Kg.cm (max.)
 - Wire Range: 14-22 Awg.
- Environmental:
 - Operating temperature: -55°C to +105°C
 - Lead free, RoHS compliant.
 - Recommended soldering temp: 235 for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, VERTICAL, 5.08mm PITCH, MATEABLE 2 AND 3 POLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SLS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EBB-XX-D	-
REF:	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1