


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/09	

APPROVED: _____
 DATE: _____ TITLE: _____

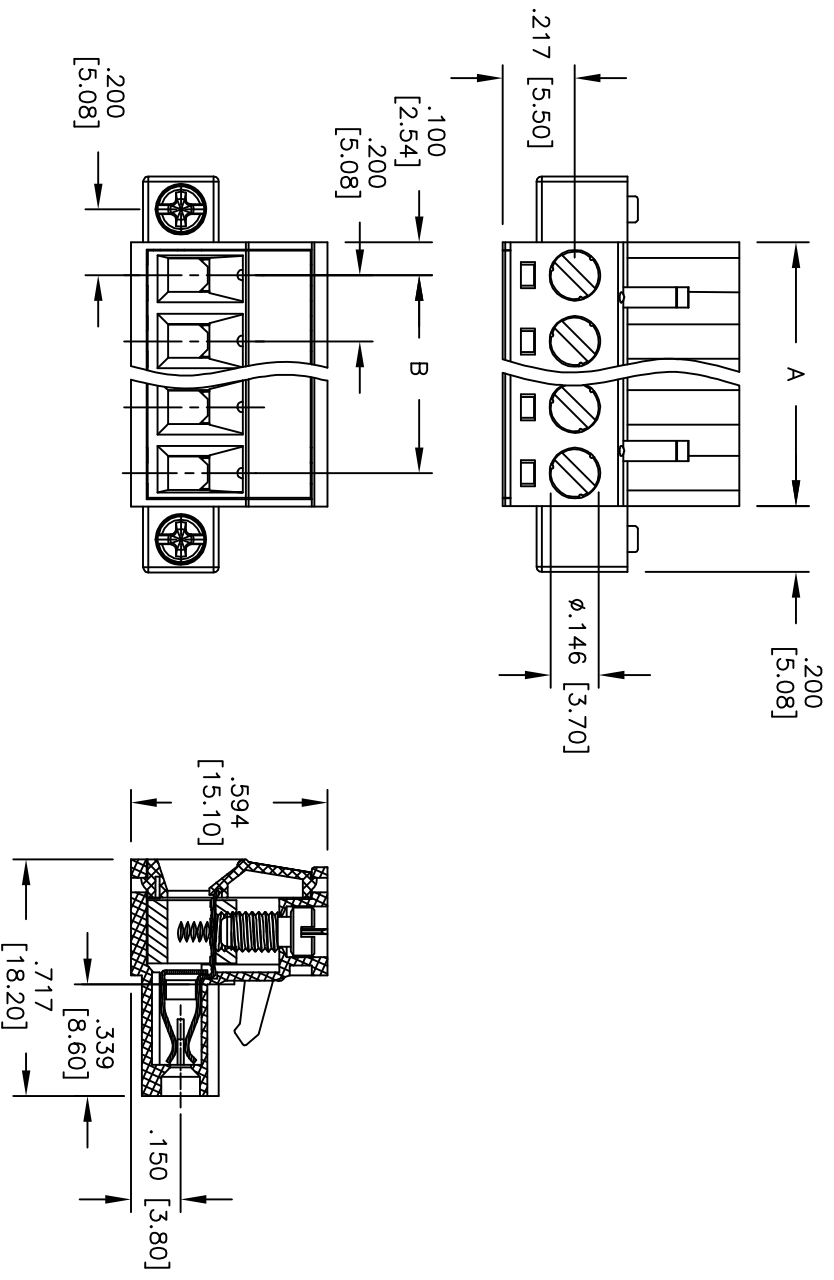

Poles: 2 thru 24
 A = .200 [5.08] x No. of Poles
 B = .200 [5.08] x No. of (Poles - 1)

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes

.X	\pm .10	ϕ X	\pm .10
.XX	\pm .020	ϕ XX	\pm .015
.XXX	\pm .015	ϕ XXX	\pm .010

APPROVALS

DRAWN	DY	10/22/09
CHECKED		
APPROVED		

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .200 [5.08] TERMINAL BLOCK

SIZE	PART NO.	REV.
X	EBH-XX-D-E	-
REF:	S00007T	SHEET 1 OF 1



SPECIFICATIONS:
 Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Electrical: Operation voltage: 300 VAC max
 Current rating: 20 Amps max
 Withstanding voltage: 1.6kv
 Mechanical: Solid wire: 12-24
 Environmental: Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.