
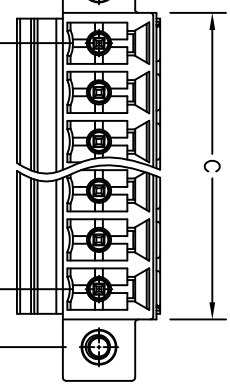
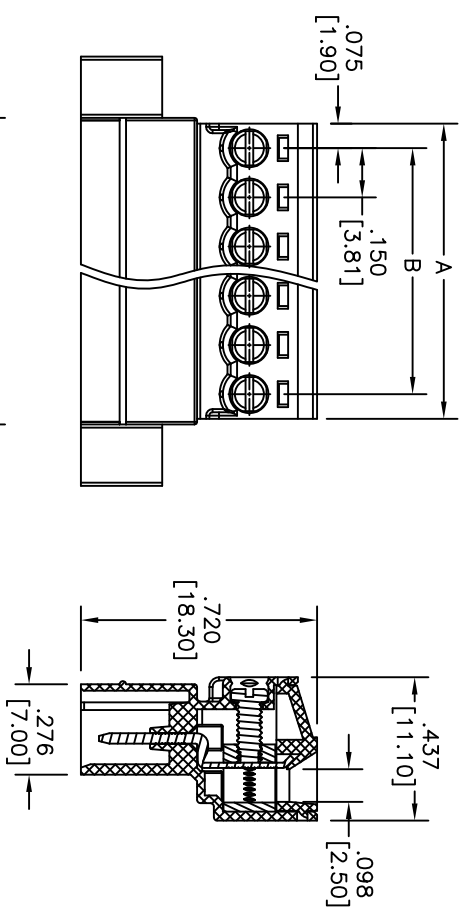


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/09/11	

APPROVED: _____

DATE: _____ TITLE: _____

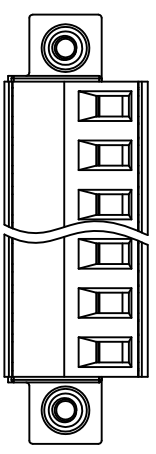


SPECIFICATIONS:

Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Terminal Body: Brass, Zinc plated
 Contact Pin: Brass, Tin plated
 Screw: Steel, Zinc plated, M2
 Flange nut: Brass

Electrical:

Operation voltage: 300V
 Current rating: 8 Amps
 Withstanding voltage: 1600 VAC for 1 minute
 Solid wire (AWG): 14-30
 Stranded wire (AWG): 14-30
 Environmental:
 Lead free, RoHS compliant.
 Operating temperature: -40°C to +115°C



2 thru 24 Poles Available
 A = .150 [3.81] x No. of Poles
 B = .150 [3.81] x No. of Spaces
 C = .150 [3.81] x No. of Poles + .035 [0.89]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10
 .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010

APPROVALS		DATE
DRAWN	DY	3/09/11
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
PLUGGABLE BLOCK, PITCH .150 [3.81]
2 THRU 24 POLES

SIZE	PART NO.	REV.
X	EBK-XX-B-EF	

REF: S000071 SCALE: NTS SHEET 1 OF 1