
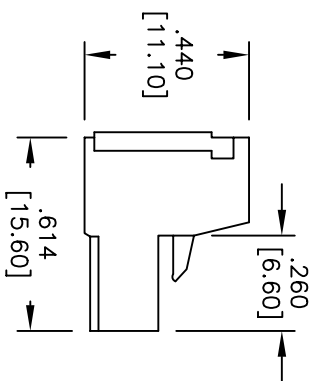
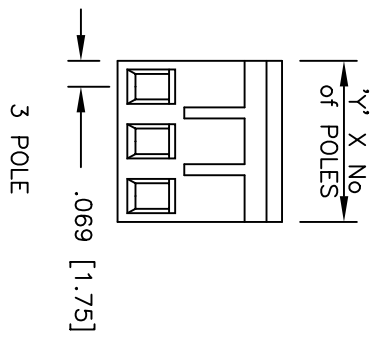
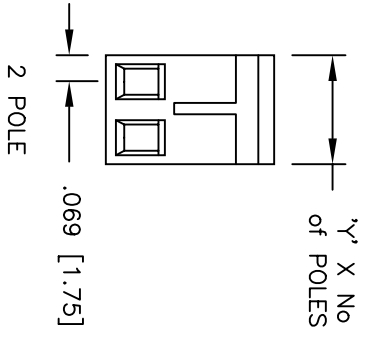




Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

AVAILABLE PITCH  
 .138 [3.50] .150 [3.81] .276 [7.00] .300 [7.62]



REPLACE 'y' WITH PITCH  
 A = .138 [3.50] B = .150 [3.81] E = .276 [7.00]  
 C = .300 [7.62]

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon, rated UL 94V-0  
 Insulator color: Blue  
 Metal Housing: Brass, Tin Plated  
 Wire Guard: Stainless Steel  
 Screw: Steel, Zinc Plated.

**Electrical:**  
 Operation voltage: 250 VAC max  
 Current rating: 15 Amps max per Pole  
 Insulation resistance: 5000 Mohms min @ 1000V  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
 Wire Range: 12-24 Awg.

**Environmental:**  
 Torque: 5 Kg.cm (max.)  
 Operating temperature: -55°C to +105°C  
 Recommended Soldering: 230°C ± 10°C for 3 Seconds ± 0.5 Seconds.

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010

APPROVALS

DATE	DATE

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
**PLUGABLE EURO BLOCK, MATABLE  
 2 AND 3 POLE, COLOR BLUE**

DRAWN	SLS	DATE	SIZE	PART NO.	REV.
CHECKED			X	EBK-XX-X	
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1