
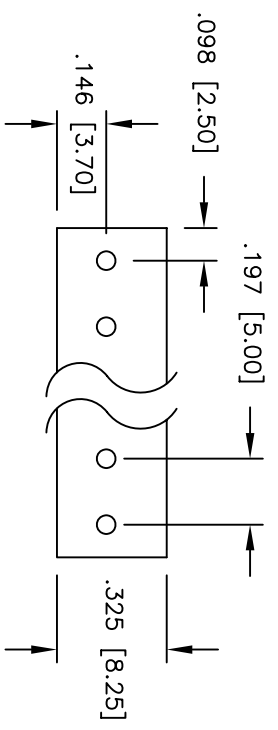
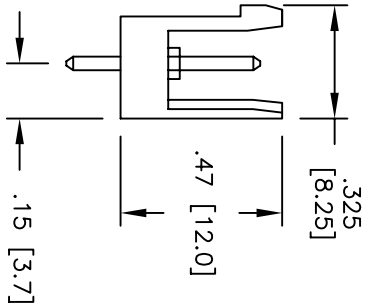
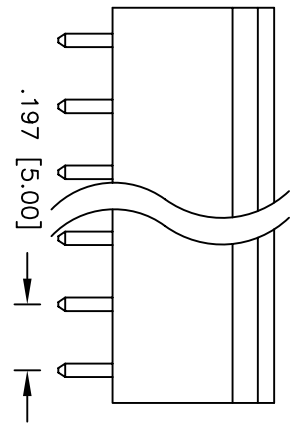


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/04	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

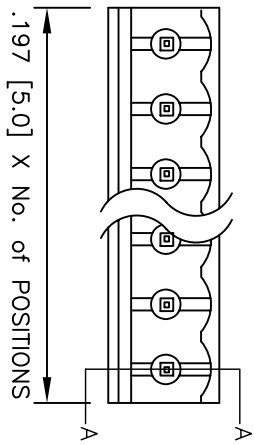

**SPECIFICATIONS:**

- Material: Nylon, rated UL 94V-0
- Insulator color: Green
- Contacts: Copper, Tin plated
- Electrical:
  - Operation voltage: 250C max
  - Current rating: 15Amps max per Pole
  - Insulation resistance: 5000 Mohms min @ 1000V
  - Dielectric withstanding voltage: 1500 VAC for 1 minute
- Environmental:
  - Torque: 4 Kg.cm (max.)
  - Operating temperature: -55°C to +105°C
  - Recommended Soldering: 235°C± 10°C for 3 Seconds ±0.5 Seconds.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**TITLE**  
 EURO BLOCK, HEADER, VERTICAL,  
 5.0mm PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SLS
CHECKED	3/30/04
APPROVED	

SIZE	PART NO.	REV.
X	EBP-XX-C	-
REF:	SCALE: NTS	SHEET 1 OF 1