
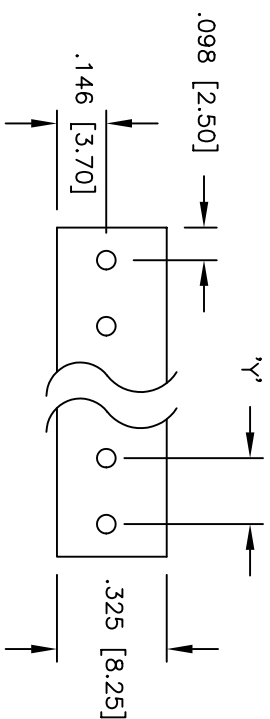
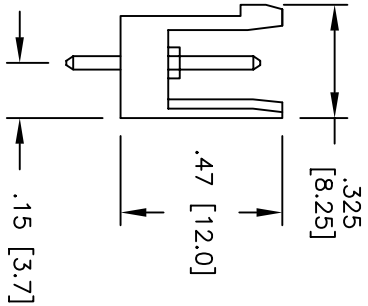
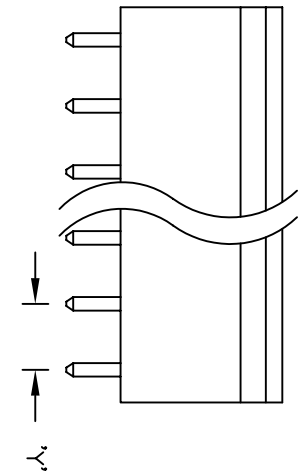


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/04	

APPROVED: _____
 DATE: _____ TITLE: _____

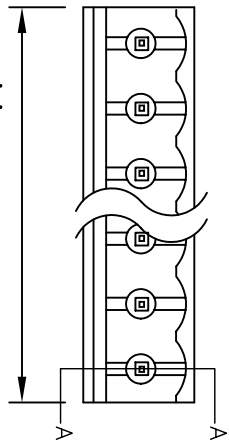

REPLACE 'Y' WITH PITCH
 C = .197 [5.00] D = .200 [5.08] H = .394 [10.00] J = .400 [10.16]

SPECIFICATIONS:

- Material: Insulator: Nylon, rated UL 94V-0
- Insulator color: Green
- Electrical: Operation voltage: 250C max
- Current rating: 15Amps max per Pole
- Insulation resistance: 5000 Mohms min @ 1000V
- Dielectric withstanding voltage: 1500 VAC for 1 minute
- Environmental: Torque: 4 Kg.cm (max.)
- Operating temperature: -55°C to +105°C
- Recommended Soldering: 230°C± 10°C for 3 Seconds ±0.5 Seconds.

A

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, HEADER, VERTICAL,
 MULTIPLE PITCHES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SLS
CHECKED	3/30/04
APPROVED	

SIZE	PART NO.	REV.
X	EBP-XX-X	-
REF:	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1

6

5

4

3

2

1

D

C

B

A

D

C

B

A