

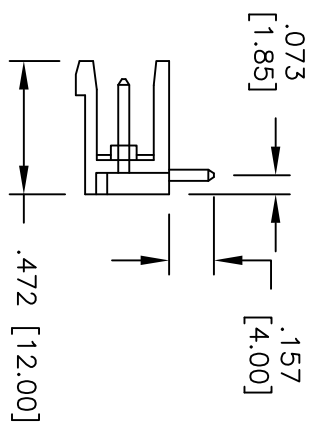



Rev	AWO #	Description	Date	Appr
-		RELEASED	4/5/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



**SPECIFICATIONS:**  
**Material:**  
 Insulator: Nylon, rated UL 94V-0  
 Insulator color: Green  
 Metal Housing: Brass, Tin Plated  
 Wire Guard: Stainless Steel  
 Screw: Steel, Zinc Plated.

**Electrical:**  
 Operation voltage: 250 VAC max  
 Current rating: 7 ~ 15 Amps max per Pole  
 Insulation resistance: 5000 Mohms min @ 1000V  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
 Wire Range: 12-24 Awg.

**Environmental:**  
 Torque: 5 Kg.cm (max.)  
 Operating temperature: -55°C to +105°C  
 Lead free, RoHS compliant.  
 Recommended Soldering: 230°C± 10°C for 5 Seconds ±0.5 Seconds.



REPLACE 'Y' WITH PITCH  
 C = .197 [5.00] D = .200 [5.08]  
 H = .394 [10.00] J = .400 [10.16] M = .295 [7.50]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS	[INCHES]
.X ± .10	ØXX ± .10	
.XX ± .020	ØXXX ± .015	
.XXX ± .015	ØXXXX ± .010	

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **EURO BLOCK HEADER, RIGHT ANGLE, POLES, 5.0, 5.08, 10.0, 10.16 & 7.05mm PITCH**

DRAWN	SLS	02/16/05	SIZE	PART NO.	REV.
CHECKED			X	EBO-XX-X	-
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1