

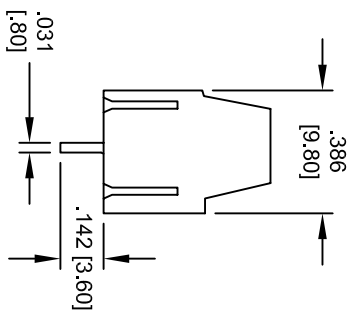
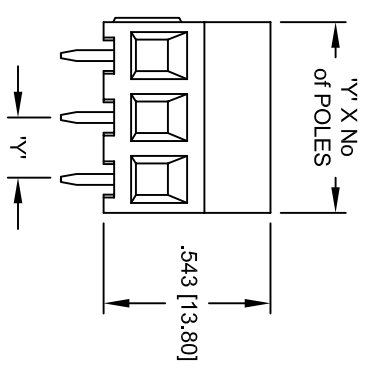


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/3/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



REPLACE 'Y' WITH PITCH LETTER  
 C = .197 [5.00] D = .200 [5.08] H = .394 [10.00] J = .400 [10.16]

**SPECIFICATIONS:**

- Material: Insulator: Nylon, rated UL 94V-0
- Insulator color: Green
- Electrical: Operation voltage: 250C max
- Current rating: 15Amps max per Pole
- Insulation resistance: 5000 Mohms min @ 1000V
- Dielectric withstanding voltage: 1500 VAC for 1 minute
- Environmental: Torque: 4 Kg.cm (max.)
- Operating temperature: -55°C to +105°C
- Recommended Soldering: 230°C± 10°C for 3 Seconds ±0.5 Seconds.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SLS
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **EURO BLOCK, STRAIGHT  
 MULTIPLE PITCHES**

SIZE: X PART NO.: EBV-XX-X  
 REF: SCALE: MTS SHEET 1 OF 1

6 5 4 3 2 1