Rev	AWO #	Description	Date	Appr
-		RELEASED	4/26/07	

APPROVED: _____

DATE: _____ TITLE: _____

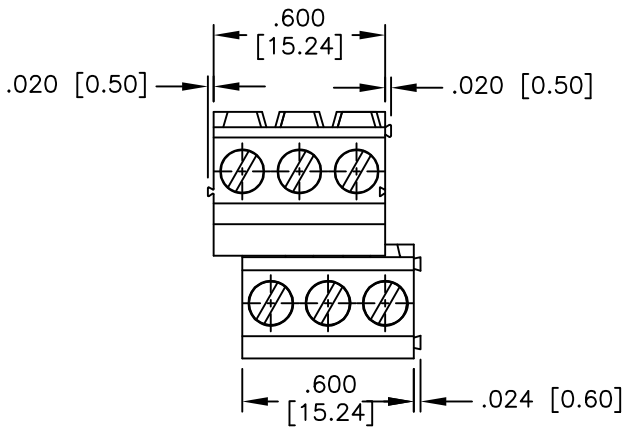

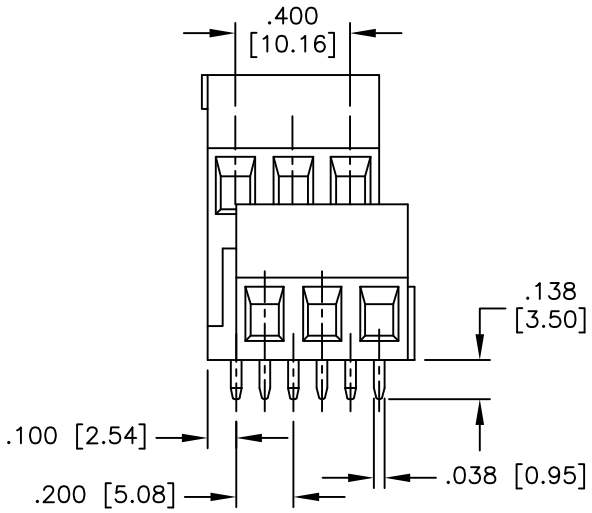

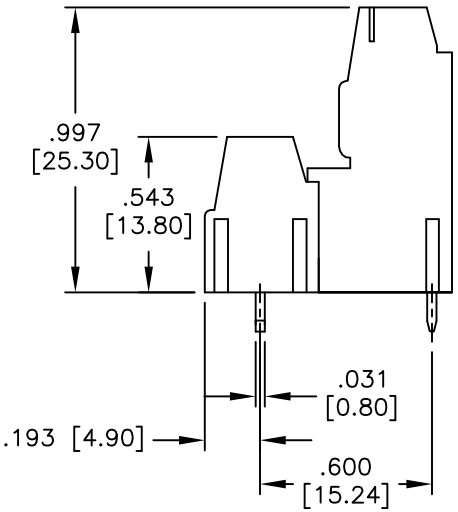

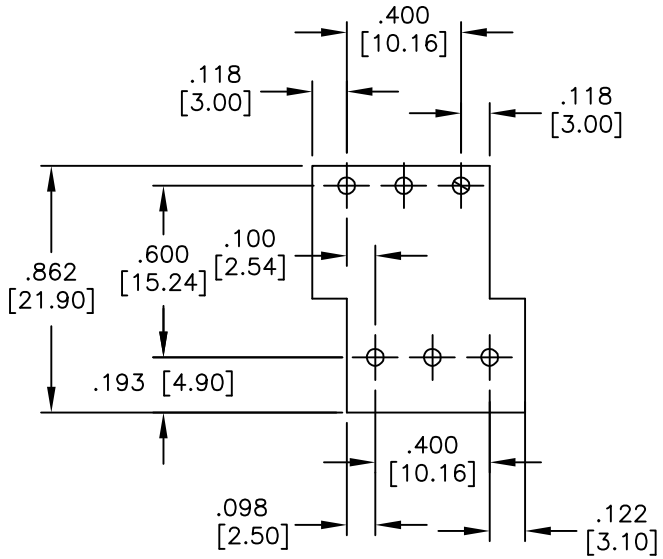

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon, rated UL 94V–0
Insulator color: Green
Plating:
Tin over Nickel underplate overall.
Electrical:
Operation voltage: 300V max
Current rating: 10 Amps max per Pole
Insulation resistance: 5000 Mohms min @ 1000V
Dielectric withstanding voltage: 2000 VAC for 1 minute
Environmental:
Operating temperature: –33°C to +120°C
Recomended Soldering Temp: 235°C for 5 Seconds.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	BW	4/26/07
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE
EURO BLOCK, DUAL
5.08mm PITCH

SIZE	PART NO.	REV.
X	EBV2-03-D	-

REF: | SCALE: NTS | SHEET 1 OF 1