
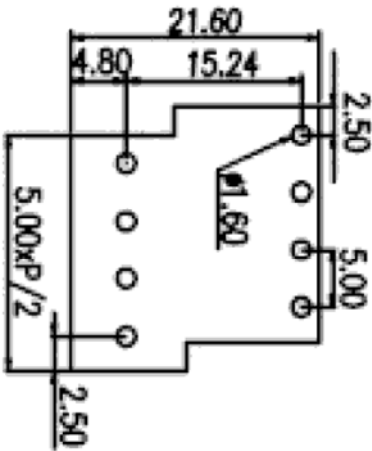


Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/06/09	

APPROVED: _____

DATE: _____ TITLE: _____

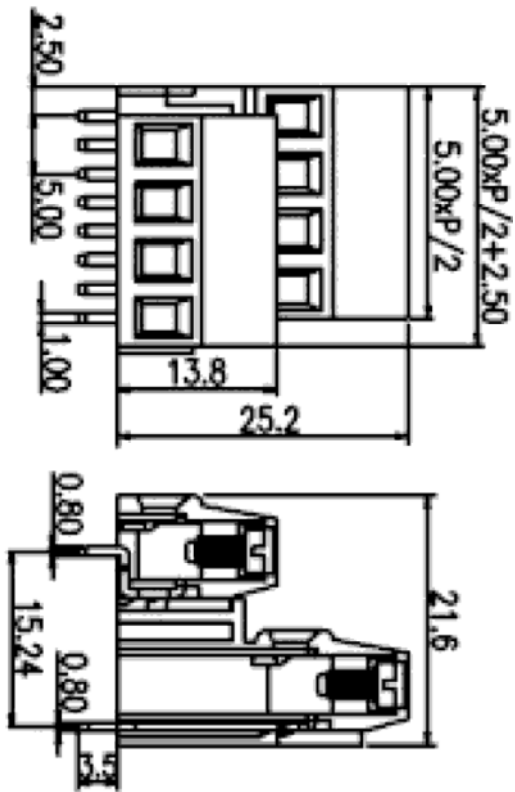

SPECIFICATIONS:

Material: Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Bronze, Tin plated

Screw: Steel, M2.5/Zn plated

Electrical:

Operation voltage: 300 VAC max

Current rating: 20 Amps max per Pole

Rated surge voltage: 1.6/2/4 KV

Mechanical:

Torque (Lb-in): 4.4

Solid wire: 24-12 AWG

Environmental:

Operating temperature: -40°C to +105°C

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	
	3/06/09

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	TERMINAL BLOCK, PCB, VERTICAL, 5.00MM PITCH
SIZE	PART NO.
X	EBV2-XX-C
REF:	S0024T
SCALE:	NTS
SHEET	1 OF 1

6 5 4 3 2 1