

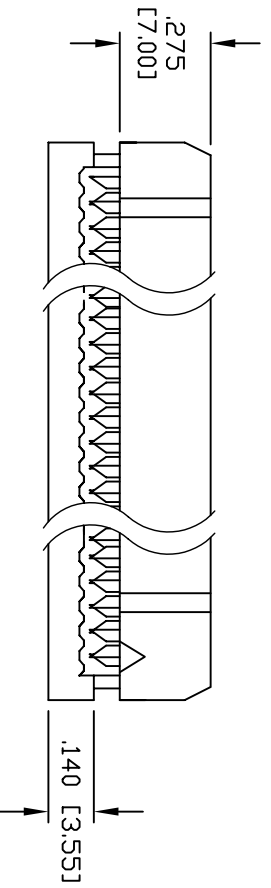


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/12/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

		DIMENSIONS																	
POSITIONS		6	8	10	12	14	16	20	24	26	30	34	40	44	50	56	60	62	64
<b>B</b>	0.200 (5.08)	0.300 (7.62)	0.400 (10.16)	0.500 (12.70)	0.600 (15.24)	0.700 (17.78)	0.900 (22.86)	1.100 (27.94)	1.200 (30.48)	1.400 (35.56)	1.600 (40.64)	1.900 (48.26)	2.100 (53.34)	2.400 (48.26)	2.700 (68.58)	2.900 (73.66)	3.000 (76.20)	3.100 (78.74)	
	0.480 (12.19)	0.580 (14.73)	0.680 (17.27)	0.780 (19.81)	0.880 (22.35)	0.980 (24.89)	1.180 (29.97)	1.380 (35.05)	1.480 (37.59)	1.680 (42.67)	1.880 (47.75)	2.180 (55.37)	2.380 (60.45)	2.680 (68.07)	2.980 (75.69)	3.180 (80.77)	3.280 (83.31)	3.380 (85.85)	
<b>A</b>																			

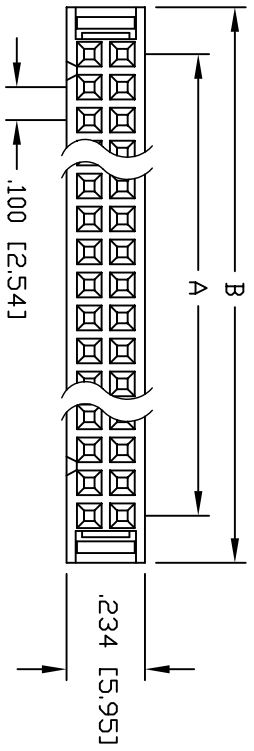

**SPECIFICATIONS:**

**Material:**

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

**Plating:**

Gold Flash over Nickel underplate on mating area, Tin over Copper underplate and IDC contact area

**Electrical:**

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 30 mohms max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**

Operating temperature: -40°C to +105°C

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IDC RECEPTACLE, DUAL ROW, NO NOTCH  
 6 TO 64 CONTACTS, SELECTIVE GOLD

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS ±.10
.X ±.10	ØXX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN SS	10/12/04
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	FCS-XX-SG-N	-
REF:	SCALE: NTS	SHEET 1 OF 1