

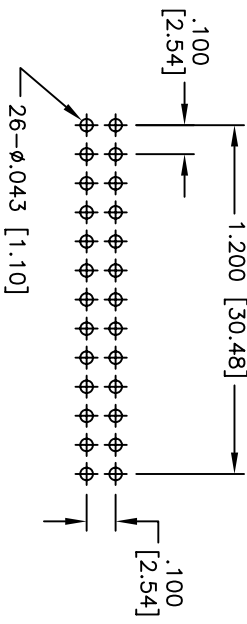

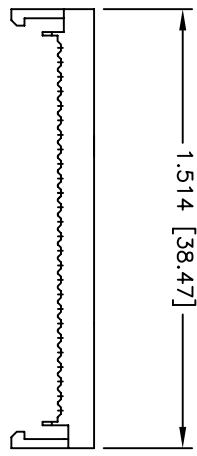


Rev	AWO #	Description	Date	Appr
-	7718	RELEASED	4/18/07	

APPROVED: _____
 DATE: _____ TITLE: _____

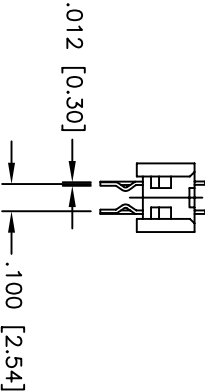

RECOMMENDED P.C.B. LAYOUT

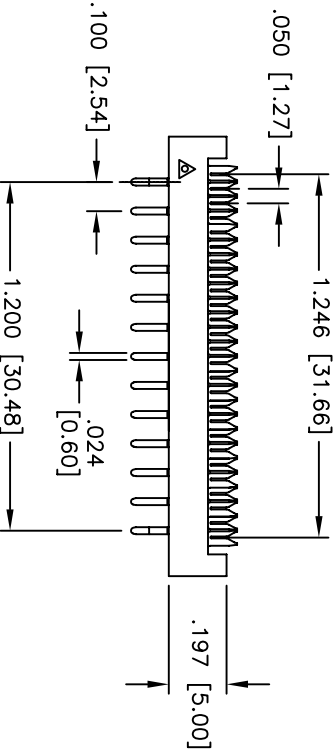

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 15 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:

Temperature Rating:

Operating temperature: -40°C to +105°C

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IDC TRANSITION PLUG
 26 POSITION W/ KINKED PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN: BW	4/18/07
CHECKED	
APPROVED	

SIZE: X	PART NO.: FTR-26-T-K01-02-25-26	REV: -
REF:	SCALE: NTS	SHEET 1 OF 1



6 5 4 3 2 1