

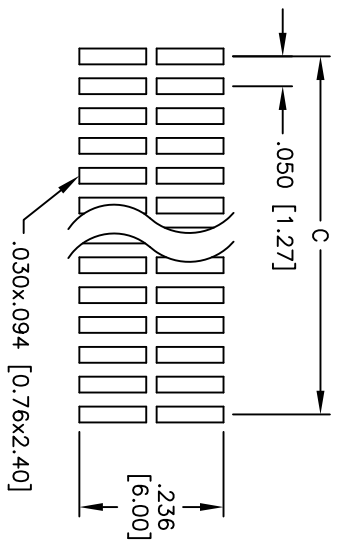
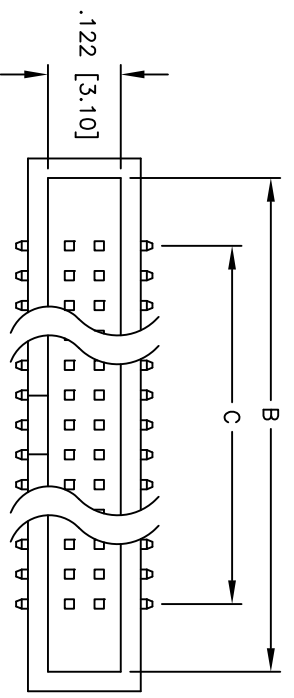


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/3/06	

APPROVED: _____ TITLE: _____
 DATE: _____



PCB LAYOUT

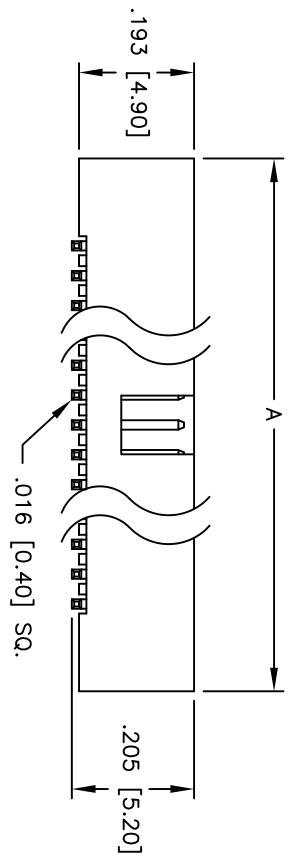

SPECIFICATIONS:

Material: Insulator: Hi-Temp Nylon, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max.

Current rating: 1 Amp max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



Positions: 10, 20, 30, 40, 50, 60, 70, 80, 90, 100
 A = .050 [1.27] x No. of Spaces + .293 [7.43]
 B = .050 [1.27] x No. of Spaces + .227 [5.77]
 C = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	Holes
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" x .050" BOX HEADER, GOLD PLATED, VERTICAL MOUNT, SURFACE MOUNT

APPROVALS	DATE
DRAWN SS	8/3/06
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	HBHR-B-XX-G-SMT	-

SCALE: NTS SHEET 1 OF 1