

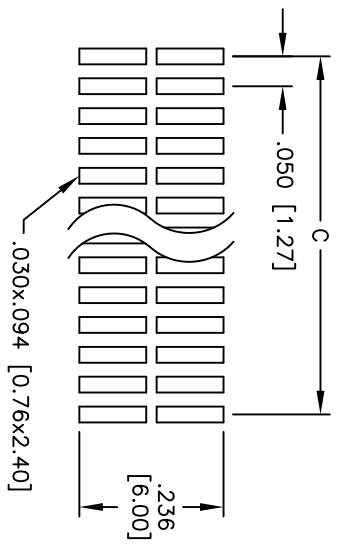
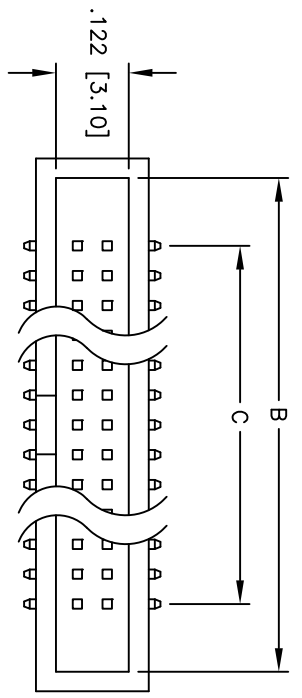


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/05	

APPROVED: _____
 DATE: _____ TITLE: _____



PCB LAYOUT

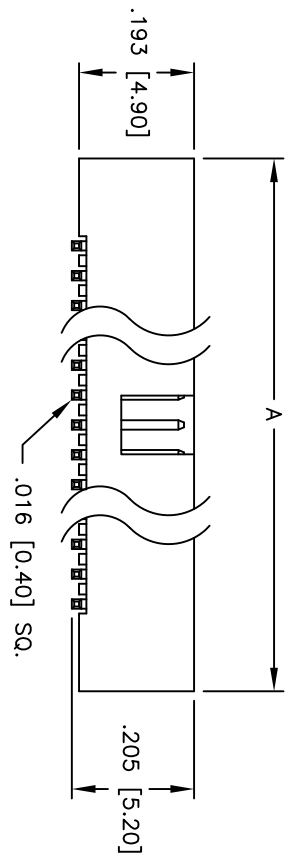

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Nylon, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold flash over Nickel underplate overall
Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

Positions: 10, 20, 30, 40, 50, 60, 70, 80, 90, 100
 A = .050 [1.27] x No. of Spaces + .293 [7.43]
 B = .050 [1.27] x No. of Spaces + .227 [5.77]
 C = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS	DATE

DRAWN	SS	3/24/05
CHECKED		
APPROVED		

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	SIZE	PART NO.	REV.
VERTICAL MOUNT, SURFACE MOUNT	X	HBHR-B-XX-VG-SMT	-

REF: SCALE: NTS SHEET 1 OF 1