

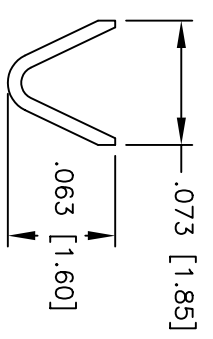


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/05	


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

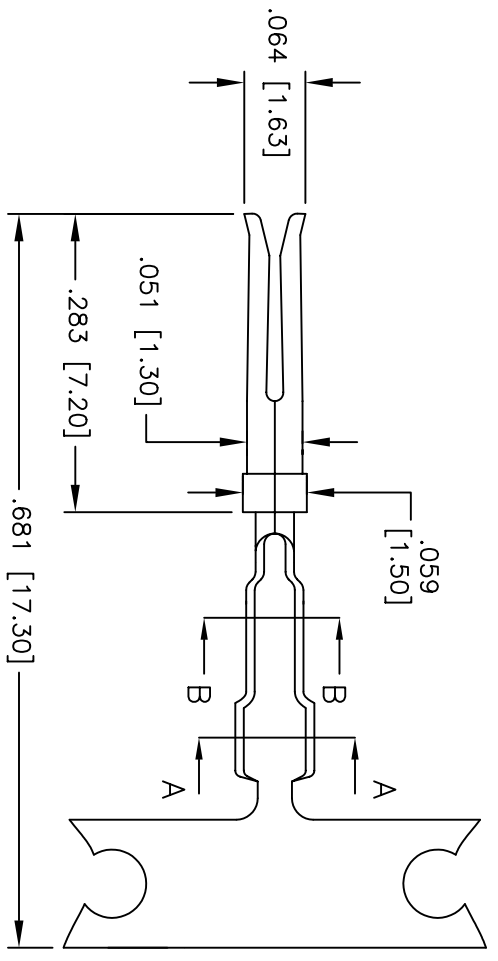

SEC A-A

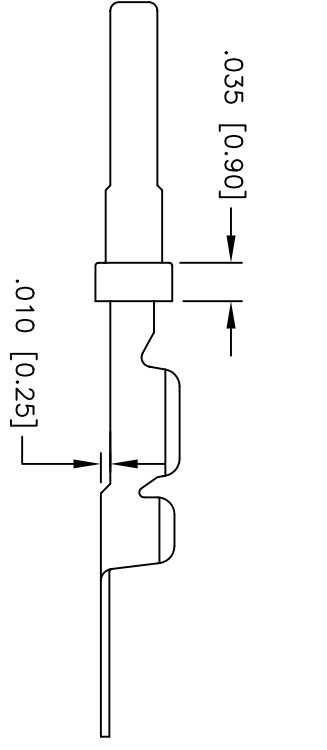

SEC B-B

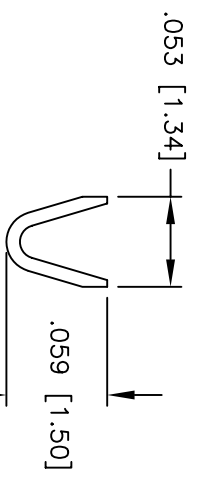

**SPECIFICATIONS:**  
 Material: \_\_\_\_\_  
 Contact: Phosphor Bronze  
 Plating: \_\_\_\_\_  
 30  $\mu$ in. Gold over Nickel underplate  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 5 Amps max  
 Contact resistance: 20 mohms max initial  
 Mechanical:  
 Recommended wire range: 24 - 26 Awg  
 Temperature Rating:  
 Operating temperature: -65°C to +125°C  
 Packaging:  
 R=10,000 PIECE REEL  
 B=1,000 PIECES LOOSE CUT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	1/13/05
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**HIGH DENSITY D-SUB SOCKET CONTACT**  
 24-26 AWG, 30  $\mu$ in. GOLD

TITLE	SIZE	PART NO.	REV.
HIGH DENSITY D-SUB SOCKET CONTACT	X	HDGS-01-X-30	-
REF:	SCALE:	NTS	SHEET 1 OF 1