

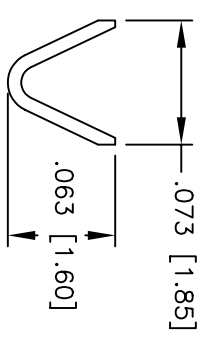


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/05	


APPROVED: _____
 DATE: _____ TITLE: _____

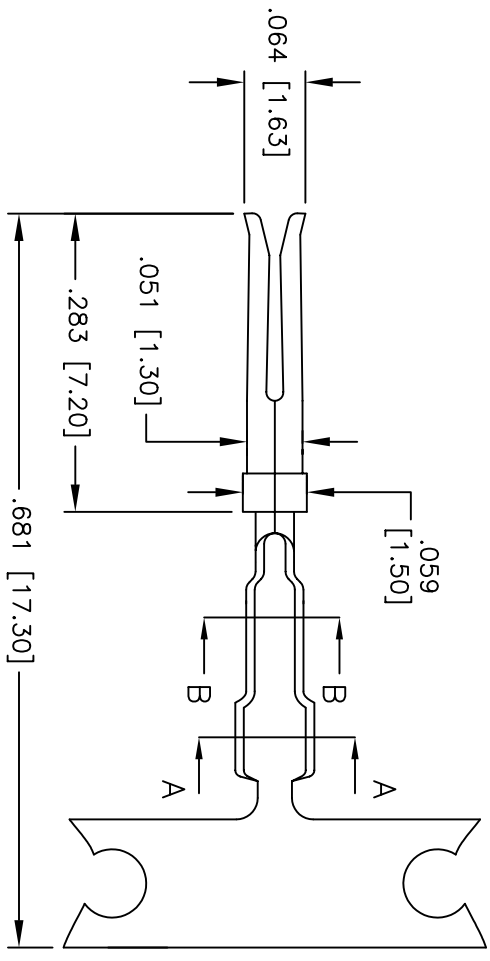

SEC A-A

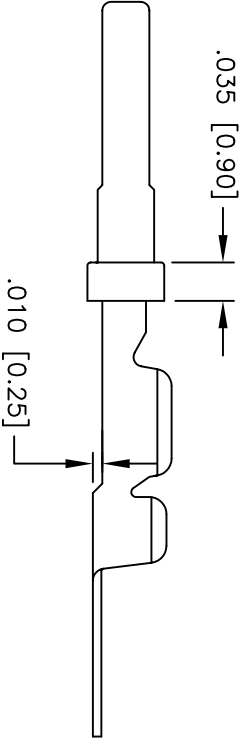

SEC B-B

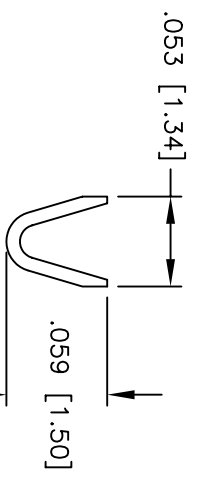

SPECIFICATIONS:

- Material: Phosphor Bronze
- Contact: Phosphor Bronze
- Plating: Gold flash over Nickel underplate
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 5 Amps max
 - Contact resistance: 20 mohms max initial
- Mechanical:
 - Recommended wire range: 24 - 26 Awg
 - Temperature Rating: Operating temperature: -65°C to +125°C
- Packaging: R=10,000 PIECE REEL
- B=1,000 PIECES LOOSE CUT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	1/11/05
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

HIGH DENSITY D-SUB SOCKET CONTACT
 24-26 AWG

TITLE	SIZE	PART NO.	REV.
HIGH DENSITY D-SUB SOCKET CONTACT	X	HDGS-01-X	-
REF:	SCALE:	NTS	SHEET 1 OF 1