
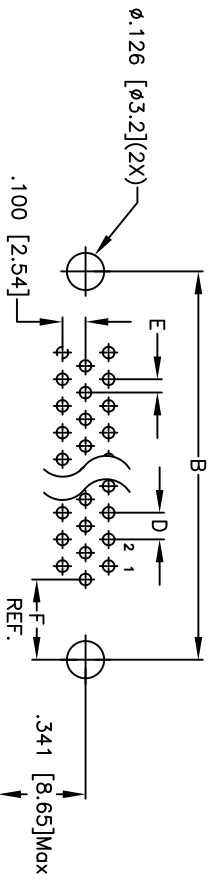
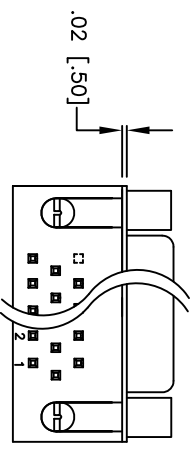
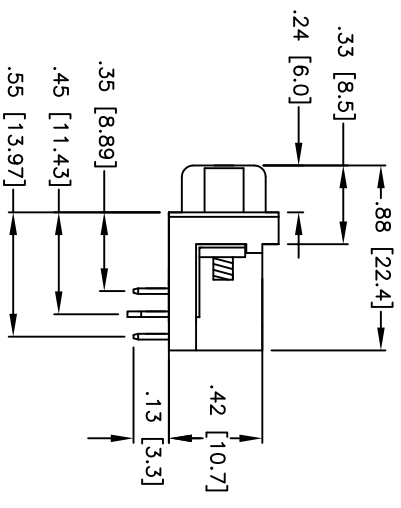


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/21/04	

POSITION	A	B	C	D	E	F
15	.642 [16.30]	.984 [25.00]	1.21 [30.8]	.090 [2.29]	.045 [1.145]	.289 [7.35]
26	.969 [24.60]	1.311 [33.30]	1.54 [39.2]	.090 [2.29]	.045 [1.145]	.272 [6.92]
44	1.508 [38.30]	1.854 [47.10]	2.09 [53.1]	.090 [2.29]	.045 [1.145]	.274 [6.95]
62	2.157 [54.80]	2.500 [63.50]	2.73 [69.4]	.095 [2.41]	.047 [1.205]	.278 [7.05]

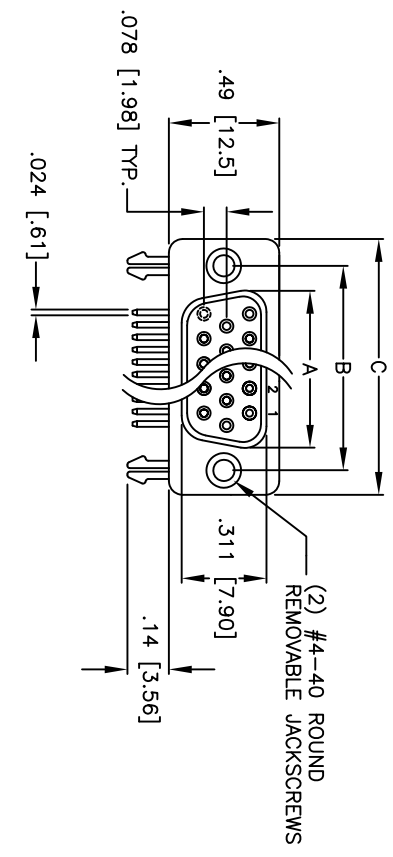

RECOMMENDED PCB LAYOUT (TOP VIEW)  
 TOLERANCES:  $\pm .004$  [ $\pm .10$ ]

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating: 30u" Gold over Nickel underplate overall  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 5 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 5000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -65°C to +125°C

A

B

C

D

A

B

C

D

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB, FEMALE HI-DENSITY, RIGHT ANGLE, PCB, ROUND JACKSCREWS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		SIZE	PART NO.	REV.
X	$\pm .10$	$\phi$ X	$\pm .10$	
.XX	$\pm .020$	$\phi$ XXX	$\pm .015$	
.XXX	$\pm .015$	$\phi$ XXX	$\pm .010$	
APPROVALS	DATE	DATE		
DRAWN	SS	12/21/04		
CHECKED				
APPROVED				
REF:				
SCALE:	NTS			
SHEET	1	OF	1	

