Rev	AWO #	Description	Date	Appr
-	-	RELEASED	8/23/10	

APPROVED: _____

DATE: _____ TITLE: _____

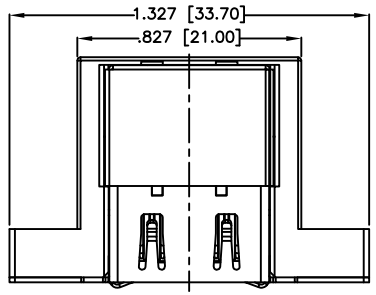

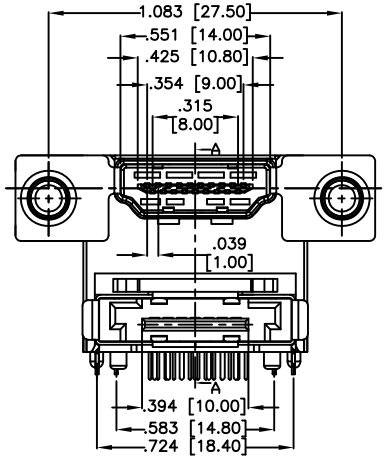

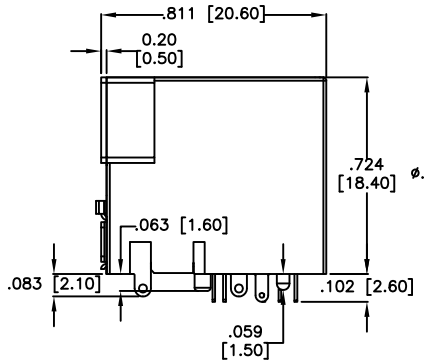

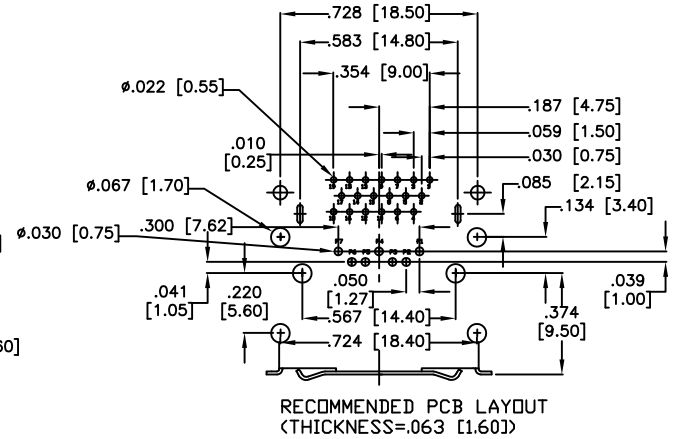

RECOMMENDED PCB LAYOUT
(THICKNESS=.063 [1.60])

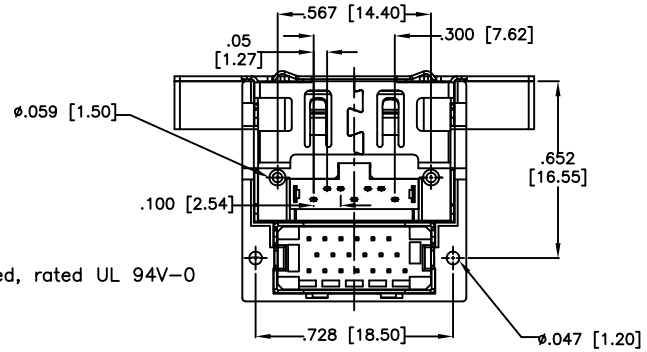

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Contacts: Gold flash over Nickel underpalte on mating area, Tin over Copper underplate on tails.
Shell: Solderable Nickel plated.
Electrical:
Current rating: 0.5 Amps max.
Insulation Resistance: 100 mOhms min.
Dielectric withstanding voltage: 500 VAC for 1 minute.(UNMATE)
300 VAC for 1 minute.(MATE)
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS Compliant
Recommended soldering temp: 235°C for 5 seconds.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/23/10
CHECKED	AH	8/23/10
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
DUAL HDMI TO ESATA STACKED CONNECTOR THROUGH HOLE TYPE

SIZE	PART NO.	REV.
X	HDMI-ESATA-S-RA-MF	-

REF:	SCALE:	SHEET
S00106T	NTS	1 OF 1