
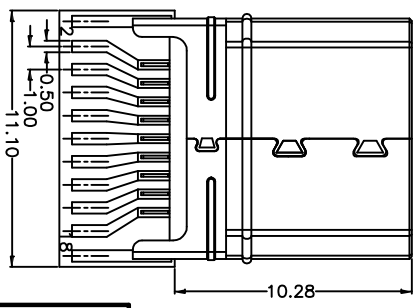
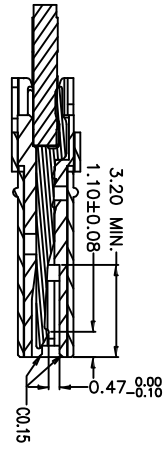
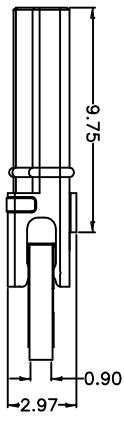
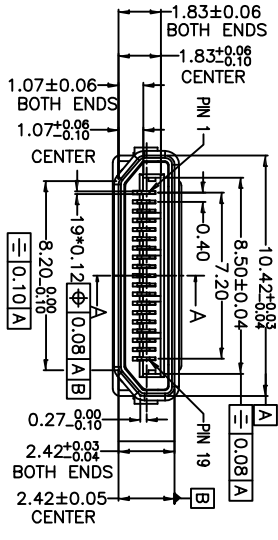


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/10	

APPROVED: _____ TITLE: _____
 DATE: _____

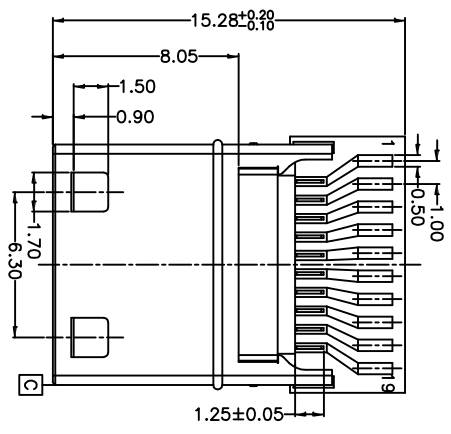

SPECIFICATIONS:

Material: HI-temp thermoplastic, UL 94V-0
 Housing color: Black
 Contact: Copper Alloy
 Shield: Copper Alloy, Nickel plated
 Plating: 15u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.
 Electrical:
 Voltage rating: 40V
 Current rating: 0.5A
 Dielectric strength: 300VAC for 1 minute min.
 Insulation resistance: 100 Megohm min.
 Contact resistance: 10 mohms max.
 Environmental:
 Lead free, RoHS Compliant
 Recommended soldering temp: 260°C for 5 seconds.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN DY	6/08/10
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	MINI HDMI C TYPE, 19P, PLUG
SIZE	PART NO. HDMI-PLUG-0M2-15
REF:	S00015C
SCALE:	NTS
SHEET	1 OF 1
REV.	