

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/10	

6

5

4









3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

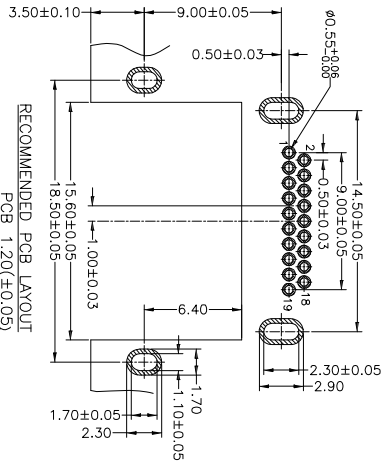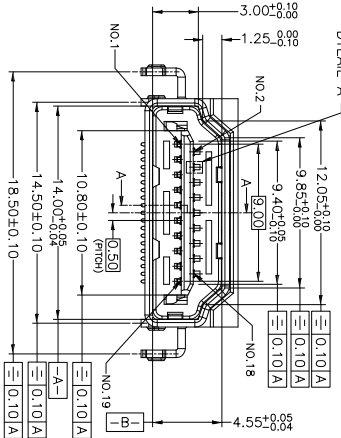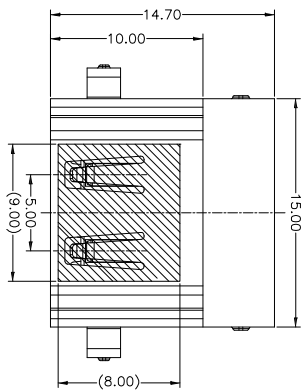

PACKAGED ON TAPE & REEL

**SPECIFICATIONS:**

- Material: Hi-temp thermoplastic, UL 94V-0
- Housing color: Black
- Contact: Copper Alloy
- Shield: Copper Alloy, Nickel plated
- Plating: 10u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.
- Electrical: Voltage rating: 40V, Current rating: 0.5A, Dielectric strength: 300VAC for 1 minute min., Insulation resistance: 100 Megohm min., Contact resistance: 10 mohms max.
- Environmental: Lead free, RoHS Compliant
- Recommended soldering temp: 260°C for 5 seconds.

A

B

C

D

A

B

C

D



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**HDMI CONNECTOR, RIGHT ANGLE  
 DIP ASSEMBLY**

TITLE: \_\_\_\_\_  
 SIZE: \_\_\_\_\_  
 PART NO.: \_\_\_\_\_  
 REF: S00015C  
 SCALE: NTS  
 SHEET 1 OF 1

6

5

4

3

2

1