Rev	AWO #	Description	Date	Appr
-		RELEASED	6/07/10	

APPROVED: _____

DATE: _____ TITLE: _____

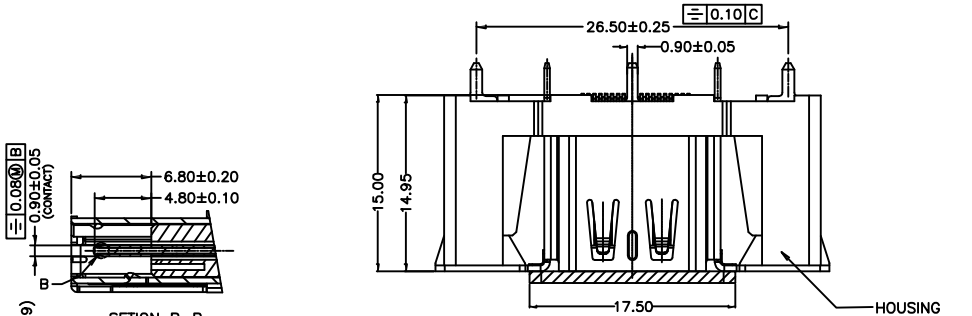



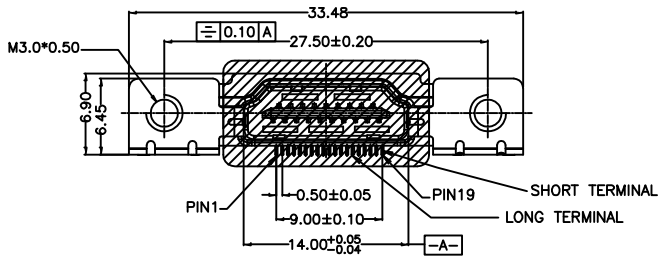

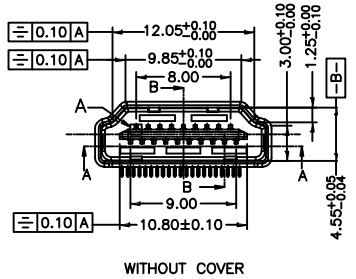



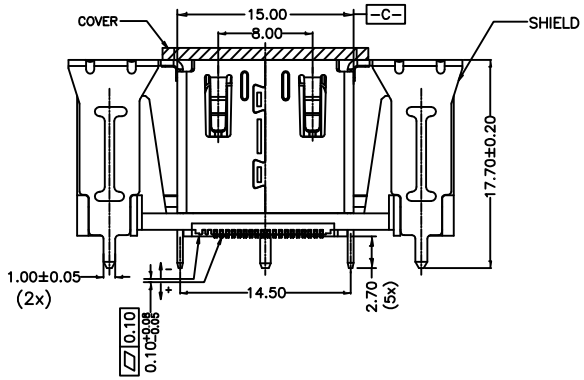



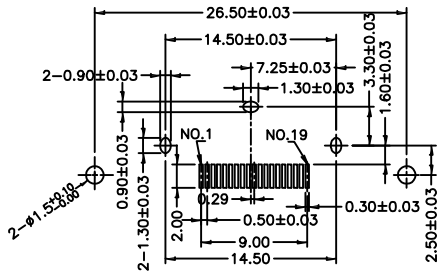

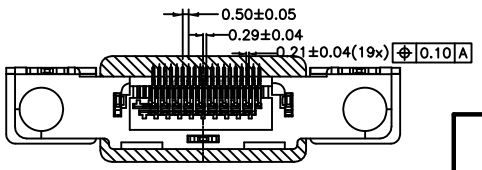

SPECIFICATIONS:
Material:
Housing: Hi–temp thermoplastic, UL 94V–0
Housing color: Black
Contact: Copper Alloy
Shield: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.
Electrical:
Voltage rating: 40V
Current rating: 0.5A
Dielectric strength: 300VAC for 1 minute min.
Insulation resistance: 100 Megohm min.
Contact resistance: 10 mohms max.
Environmental:
Lead free, RoHS Compliant
Recommended soldering temp: 260°C for 5 seconds.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/07/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
HDMI CONNECTOR, 19P, VERTICAL, SMT

SIZE	PART NO.	REV.
X	HDMI-S-V-01-SMT-MF-KT	-

REF: S00015C | SCALE: NTS | SHEET 1 OF 1