

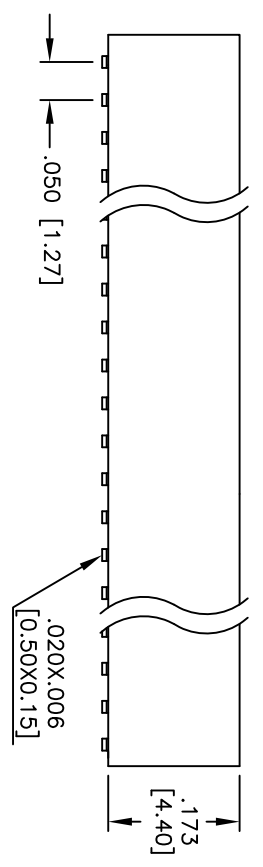
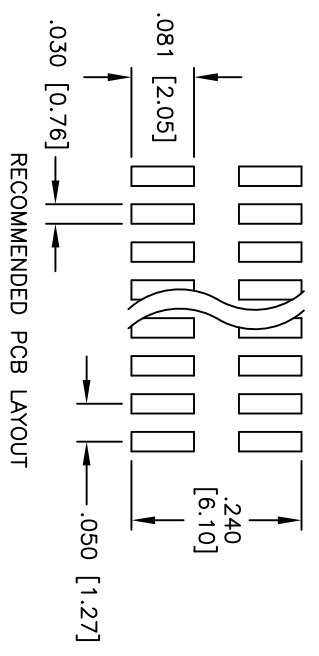


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/01/11	

APPROVED: _____
 DATE: _____ TITLE: _____

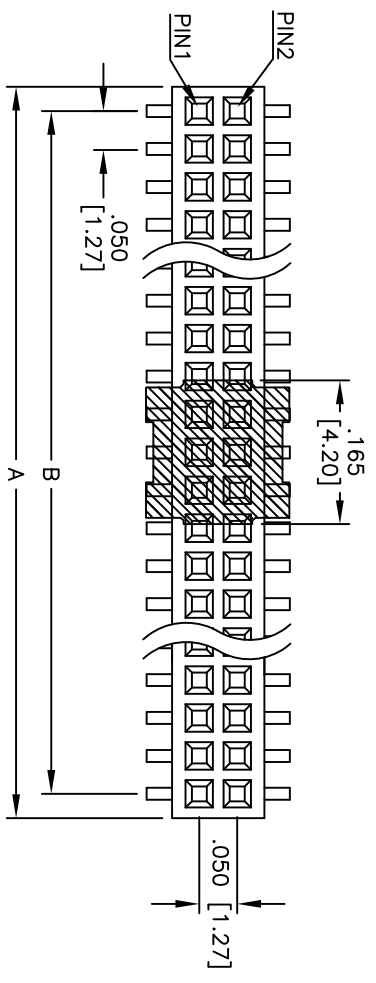

SPECIFICATIONS:

Material: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating: Gold flash over Nickel underplate overall.

Electrical:
 Current rating: 1 Amp max.

Insulation resistance: 20 mohms max. initial
Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



Positions: 4 thru 100
 A = .050 [1.27] x No. of Positions + .016 [0.40]
 B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]

TOLERANCES: EXCEPT AS NOTED	HOLDS	INCHES	MM
.X ± .10	ØX	± .10	
.XX ± .020	ØXX	± .015	
.XXX ± .015	ØXXX	± .010	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] FEMALE HEADER, SMT TYPE
 PICK & PLACE CAP, GOLD PLATED

DRAWN	DY	4/01/11	SIZE	PART NO.	REV.
CHECKED			X	HFH-XX-G-SMT-PP-NK-NP	-
APPROVED			REF: S00788T	SCALE: NTS	SHEET 1 OF 1