
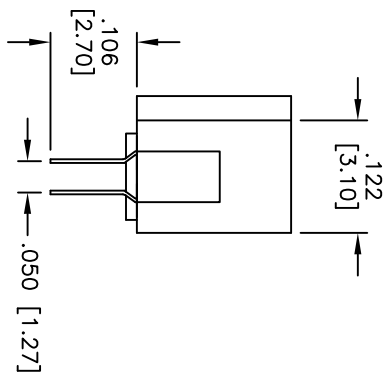
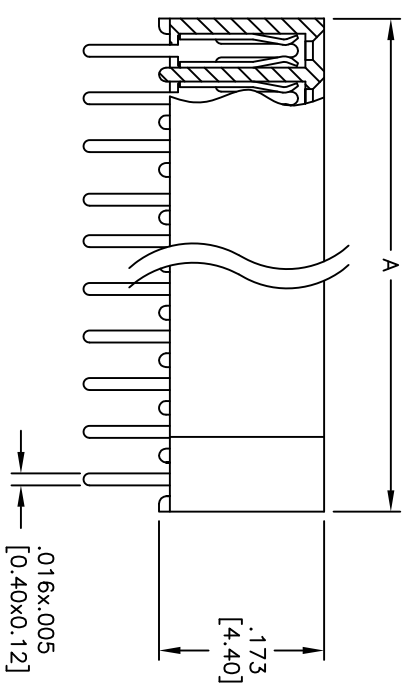
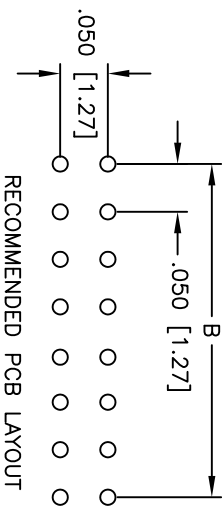


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/09/08	

APPROVED: _____
 DATE: _____ TITLE: _____

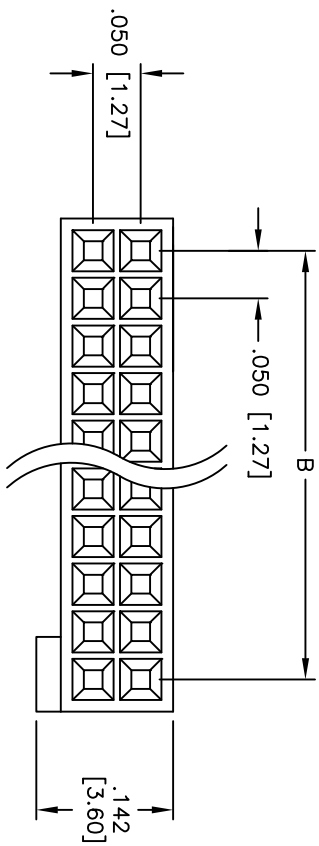

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall.

Electrical:

Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 300 VAC for 1 minute

Environmental:

Temperature Rating:
 Operating temperature: -40°C to +105°C
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

A = .050 [1.27] X No. of Positions Per Row+ .014 [0.35]
 B = .050 [1.27] X No. of Spaces Per Row

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ±.10 ØXX ±.10
 .XX ±.020 .XXX ±.015
 .XXX ±.015
 APPROVALS: DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] PITCH SHROUDED FEMALE HEADER
 DUAL ROW DIP TYPE, GOLD PLATED

DRAWN	DY	10/09/08	SIZE	PART NO.	REV.
CHECKED	AY	8/12/10	X	HFH-XX-G	-
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1