
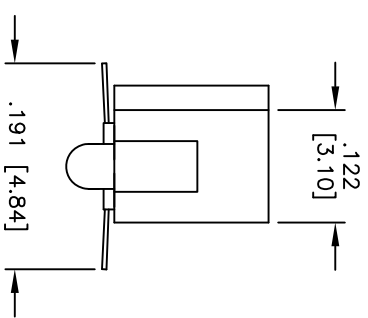
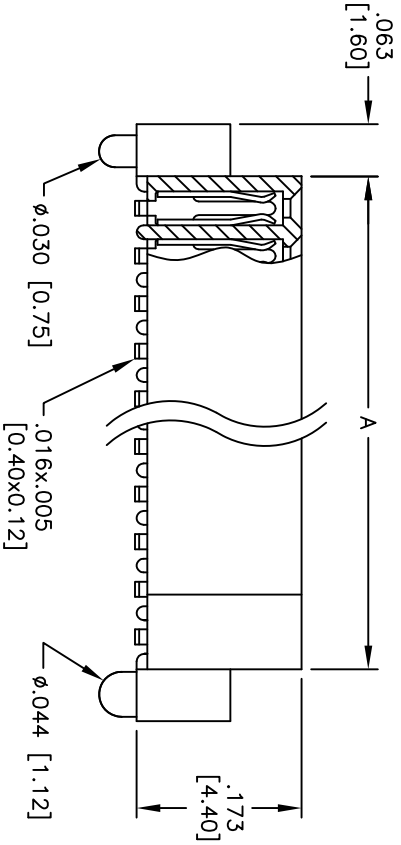
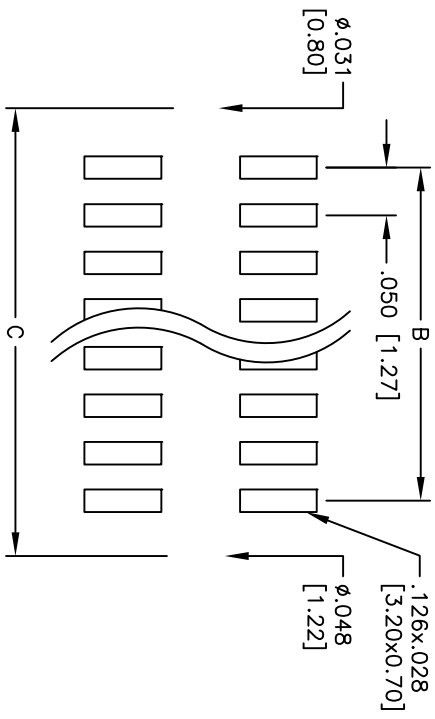


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/18/05	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

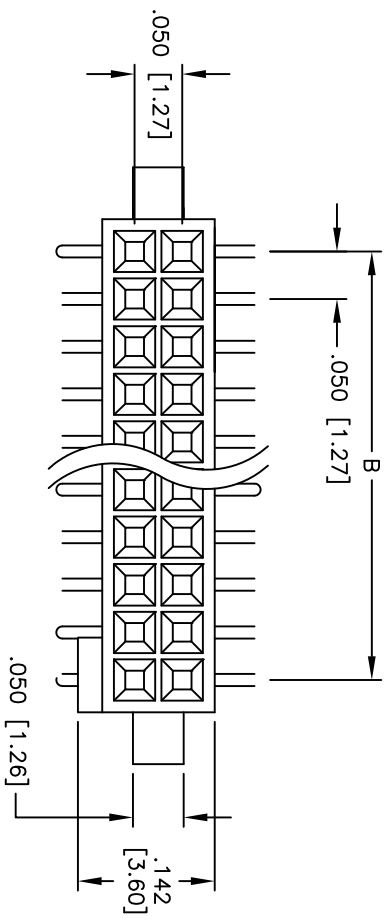

**SPECIFICATIONS:**

- Material: Nylon 6T, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical:
  - Operating voltage: 250 VAC max.
  - Current rating: 1 Amp max.
  - Contact resistance: 20 mohms max. initial
  - Insulation resistance: 5,000 Mohms min.
  - Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating:
  - Operating temperature: -40°C to +105°C
- Environmental:
  - Lead free, RoHS compliant
  - Recommended soldering temp: 260°C for 5 seconds



UNLESS\*  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED

INCHES	HILES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

TITLE

WITH PEG OPTION

DRAWN SS  
CHECKED

SIZE PART NO.