

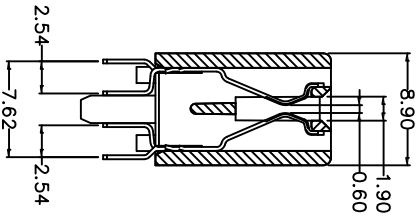
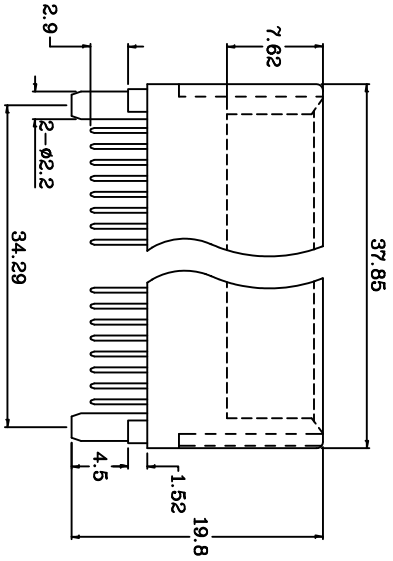


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/10/10	


APPROVED: _____ TITLE: _____
 DATE: _____

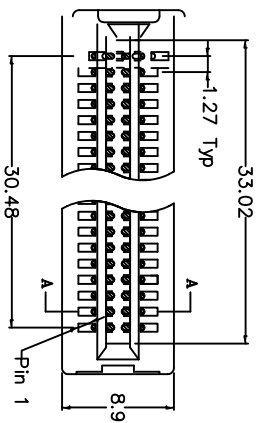


Section A-A

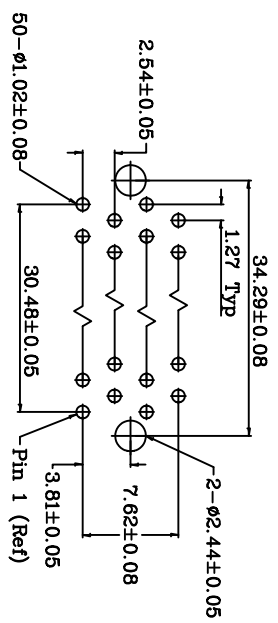

P.C. Board Layout

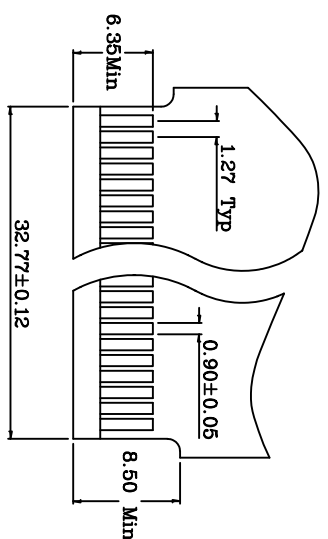

Daughter Card Requirements



SPECIFICATIONS:

- Material: PPS, 30% glass reinforced, rated UL 94V-0
- Insulator color: Brown
- Contacts: Copper Alloy
- Plating:
 - Gold flash over Nickel underplate on contact area,
 - Tin over Copper underplate on PCB tails
- Electrical:
 - Operating voltage: 125 VAC max.
 - Current rating: 1 Amp max.
 - Contact resistance: 30 mohms max initial
 - Insulation resistance: 1,000 Mohms min
 - Dielectric withstanding voltage: 500 VAC for 1 minute
 - Temperature Rating:
 - Operating temperature: -55°C to +105°C
 - Environmental:
 - Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED INCHES	
X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN DY	8/10/10
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	VESA MICRO CHANNEL CARD EDGE PLASTIC PEGS, SELECTIVE GOLD	
SIZE	PART NO.	REV.
X	HMCA-A-50-G	-
REF:	SCALE: NTS	SHEET 1 OF 1